

1 Data sheet — Aurora CT SDBB-ST32SE

Aurora CT are multi-slice X-ray detectors, with integrated amplifiers and AD converters. They have scintillators attached to photosensors for X-ray detection. Aurora CT detector provides data for 3D computed tomography imaging.

This data sheet describes the SDBB-ST32SE detector with Full configuration of 32 slices.

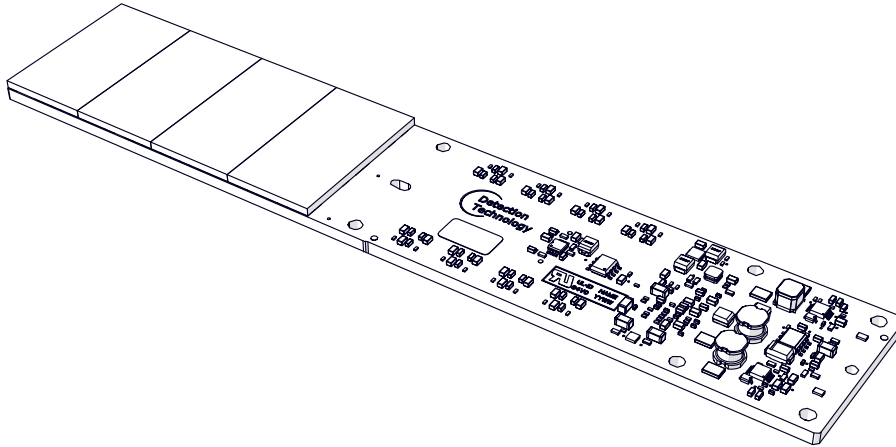


Figure 1: SDBB-ST32SE detector with Full configuration

1.1 Key features

- Head-to-head and side-by-side tileable detector modules for 32 to 64 slice system
- Flexible single and dual energy configurations
- Detector matrix built on individual low-noise BSI photodiodes
- High-light-output, afterglow-free scintillator matrix
- Wide sensitivity range from 0.25 pF to 31.75 pF with 127 steps
- Robust structure with reliable mechanical and electrical interfaces
- Centralized remote firmware update by the X-DCB
- Local diagnostics functions: test patterns, temperature and voltage monitoring
- ROHS and EMC compliance
- Complete subsystems available, including detectors and a controller and software library for rapid system development

1.2 Typical applications

- Cabin Baggage (CB) or Hold Baggage (HB) inspection in Aviation
- Hi-end air cargo and logistics scanning
- Fast 3D-imaging for in-line industrial scanning

2 Ordering information

Table 1: Ordering information

Product code	Product name	Product description
3000026771	SDBB-ST32SE	16 pixels x 32 rows, 2.5 x 2.75 mm pitch, single-energy, copper filter configurable by system for dual-energy

3 Technical specifications

Table 2: Technical specifications — SDBB-ST32SE

Feature	SDBB-ST32SE
Pixel size in X-axis (mm)	2.5
Pixel size in Y-axis (mm)	2.75
Pixel active area (PD) (mm)	2.3 x 2.55
Row pitch (mm)	2.75
Scintillator material	1.8 mm ceramic GOS
Mechanical width (X-axis)	40.3 mm ± 0.1 mm
Mechanical length (Z-axis)	208.4 mm ± 0.2 mm
Mechanical height (Y-axis)	<15 mm
Number of pixels	512
Number of pixels in X-axis	16
Number of pixels in Z-axis	32
Min integration time	0.35 ms
A/D resolution	20 bits with 16-bit data transmission
Sensitivity range	0.25 pF—31.75 pF, 127 steps
Interface to control unit	X-Link, 14-pin connector
X-ray Response Non-Uniformity, within row	-15 % ~+15 %
X-ray Response Non-Uniformity, row to row	-20 % ~+20 %
X-ray Response Non-Uniformity, detector to detector	-20 % ~+20 %
Dynamic range	>10000:1 @ 6 pF
Operation voltage	+24 VDC
Power consumption	3.2 W (typical)
Weight	280 g
G-force	Max 20 G

Feature	SDBB-ST32SE
Radiation hardness	Signal drop <30 % @ 100 kGy, 160-180 KV For electronics, the maximum allowed X-ray dose after shielding: 200 Gy

Photosensitive area specifications

The photosensitive area specifications are:

Table 3: Photosensitive area specifications

Parameter	Value
Pixel pitch (P)	2.5 mm
Row pitch (R)	2.75
Pixel width (W)	2.3 mm
Pixel height (H)	2.55 mm
Pixel active area	8.87 mm ²

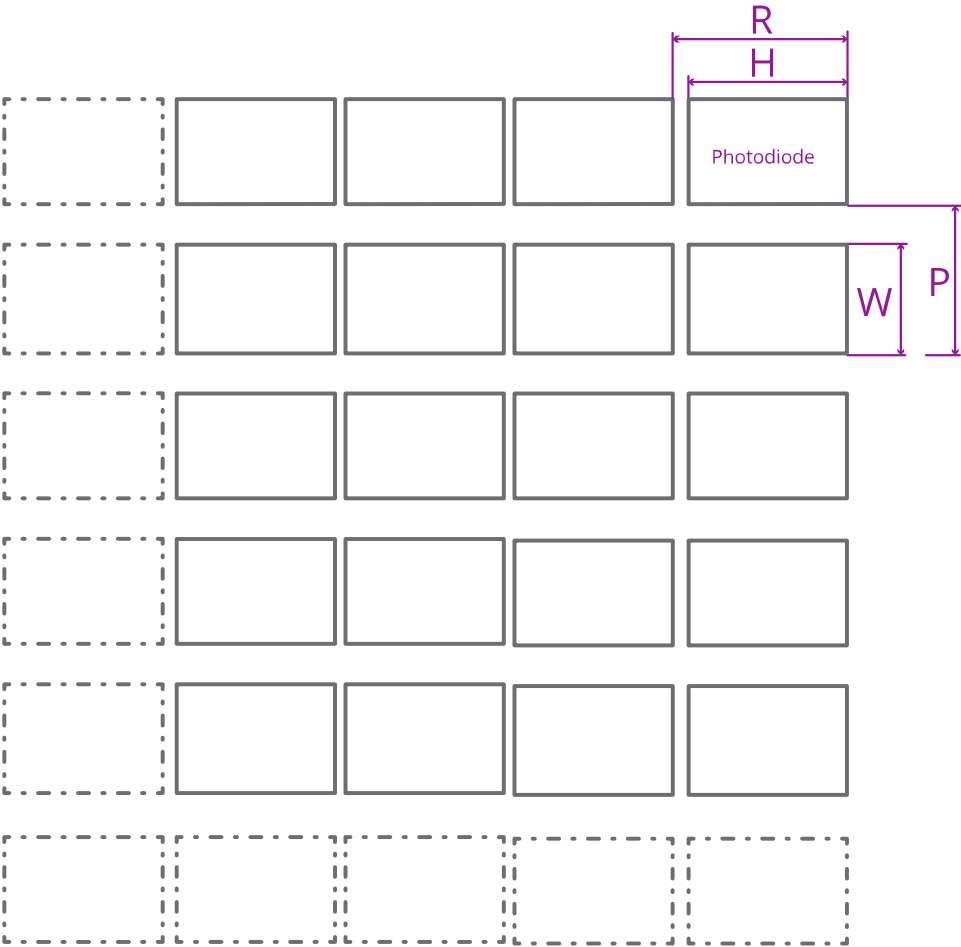


Figure 2: Photosensitive area

5 Mechanical outline drawing

- Operating temperature: 0 °C—+50 °C
- Operating humidity: 5 %—85 % RH (non-condensing)
- Storage temperature: -40 °C—+60 °C
- Storage humidity: 5 %—95 % RH (non-condensing)

5 Mechanical outline drawing



The command interfaces are:

- cmd in — The command input from X-DCB or the previous detector, and image data output to X-DCB or the previous detector. If this is the first card of the X-Link segment, always connect this connector to the X-Link connector on the X-DCB.
- cmd out — The image data input from the next detector and command output to the next detector. Never connect this connector to the X-DCB. If this is the last card of the X-Link segment, this connector will be empty.

6 Disclaimer

All information presented in this manual is believed to be accurate and reliable. However, Detection Technology Plc assumes no responsibility for the use of such information for any infringements of patents or other rights of third parties that may result from its use. Due to a continuous product development, information in this document is subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Detection Technology.

6.1 Copyright

All rights reserved. No part of this publication may be reproduced, in any form or by any means, without a written permission from Detection Technology Plc.

6.2 Warning

Detection Technology, Plc. assumes no liability for damages consequent to the use of the product presented in this manual. The product presented is not designed with components of a level of reliability suitable for use in life support, medical or other critical applications.

6.3 Contact information

Detection Technology Plc
Elektroniikkatie 10, FI-90590 Oulu, Finland
Tel +358 20 766 9700
Fax +358 20 766 9709
contact@deetee.com
www.deetee.com