

# photomultiplier HV base

## HV130K20AN series data sheet

### 1 description

The HV130K20AN is a compact photomultiplier HV Base operating from a low voltage supply (+5 to +15 V). It incorporates a negative HV supply and an active MOSFET voltage divider. The HV Base is intended for use with 10 stage, 90 mm and 130 mm capped photomultipliers requiring up to -2000 volts and ac or dc coupling.

The unit is housed in a screened cylindrical metal enclosure the diameter of which is compatible with the photomultiplier overcap. Threaded mounting bushes are provided. The signal is accessible via a 0.5 m length of shielded RG174U cable and is ac coupled.

The photomultiplier operating voltage is set by using any one of three programming options as shown in section 8. The anode is at ground potential in the HV130K20AN but for applications requiring grounded cathode operation, a positive polarity version HV130K20AP is available.

### 2 applications

The HV130K20AN is designed for use in the following operating modes:

- current measurement (analogue)
- pulsed light
- photon counting


### 3 features

- compact
- no high voltage cables
- low noise
- linearity limited only by photomultiplier performance
- low power consumption

### 4 specifications

at HV = 1000V	unit	min	typ	max
supply voltage	V	+5		+15
control voltage	V	+0.1		+2.0
output high voltage	V	-100		-2000
output (anode) current	$\mu$ A			200*
supply current at +5 V; for anode current = 0 $\mu$ A	mA		70	
for anode current = 100 $\mu$ A	mA		150	
supply current at +12 V: for anode current = 0 $\mu$ A	mA		40	
for anode current = 100 $\mu$ A	mA		60	
line regulation	%/V			0.01
anode load regulation: for anode current 0 - 100 $\mu$ A	%			0.01
temperature coefficient	%/°C			0.02
switch-on time (10 - 90%)	s		0.2	
switch-off time (90 - 10%)	s		3	
anode ripple: for anode load = 10 k $\Omega$    22 pF	mV(p-p)		1	
weight	g		100	


\*Subject to photomultiplier limit

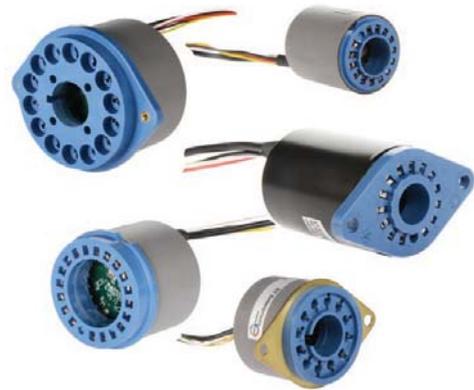

### 5 ratings


	unit	min	typ	max
supply voltage	V	4.5		18
control voltage	V	0		3
temperature (operating): at 93% RH, non-condensing	°C	-40		60

### 6 schematic diagram

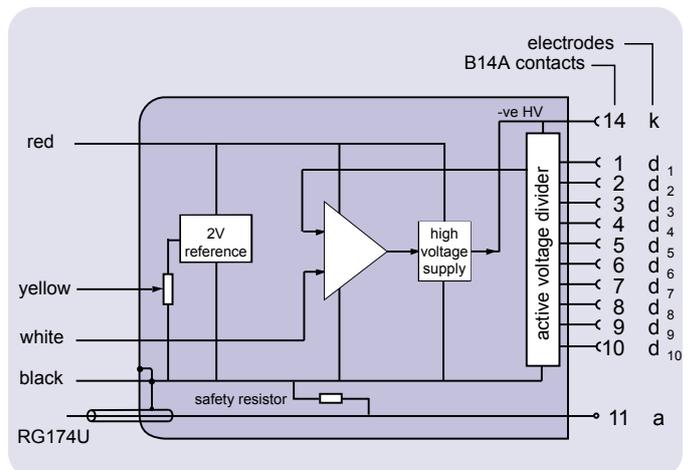


### 7 voltage distribution

The photomultiplier pin configuration for this HV base is given below. The voltage distribution for an applied HV of V volts is shown in the table. A 10 M $\Omega$  safety resistor is connected between anode and ground to maintain the output at 0 V.

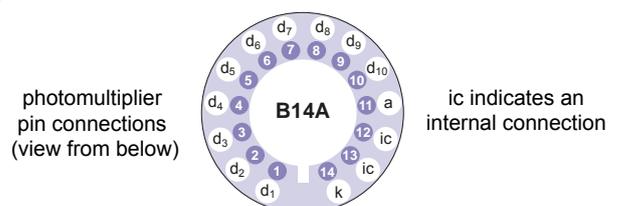

k	d <sub>1</sub>	d <sub>2</sub>	...	d <sub>9</sub>	d <sub>10</sub>	a
6/16V	1/16V	...	...	1/16V	1/16V	1/16V

## 8 programming options

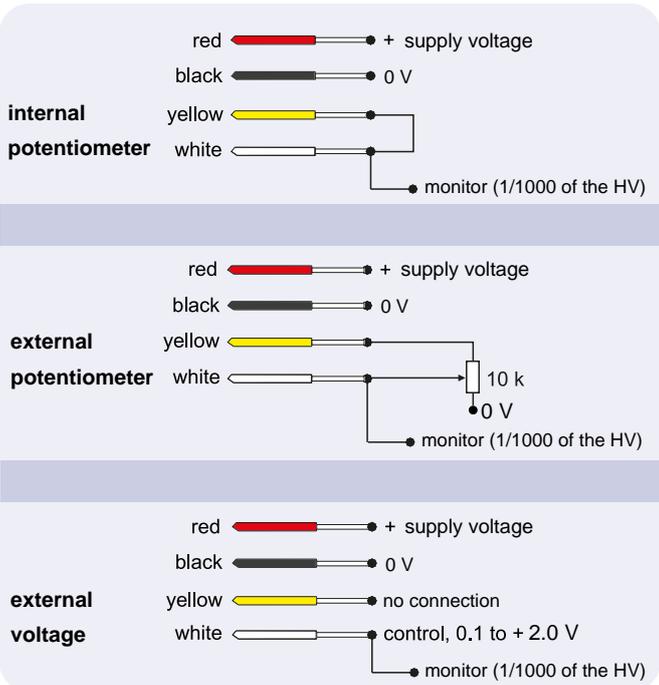


## 9 photomultiplier options and dimensions

The HV130K20AN series HV base can be used with the following photomultiplier:

9390KB

all dimensions in mm

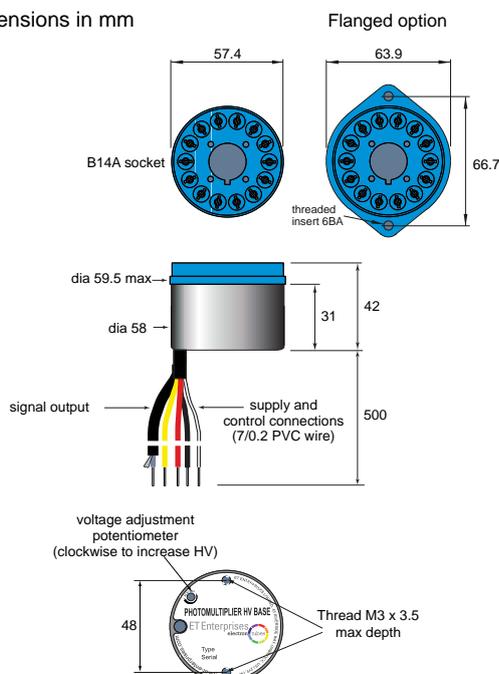

## 10 linearity


Linearity performance is dependent on the particular photomultiplier being used with the HV Base. It is measured as the % deviation in either peak pulse current, or average current, depending on the mode of operation.

Please refer to the corresponding photomultiplier data sheet for further information.


## 11 output configurations

The pmt anode in the HV130K20AN HV Base is internally grounded via a 10 MΩ safety resistor. Depending on the mode of operation, the output circuitry should be configured externally as shown in the example configurations below. For dc and scintillation applications  $R_L$  is typically 100 kΩ, but for fast pulse applications  $R_L$  would normally be 50 Ω. In the latter case an internal 50 Ω matching resistor can be fitted (to special order).


a) dc current output



b) dc voltage output



c) ac coupled output



C = external coupling capacitor  
 $R_L$  = external load resistor

## 12 ordering information

item	ordering code
without flange	HV130K20AN
with flange	HV130K20ANF

## 13 warning

The high voltages generated by these products present an electrical shock hazard and appropriate precautions must be taken.

Installation must be by qualified personnels.

All units are despatched with the internal potentiometer set to zero.

Do not operate outside the quoted ratings of the HV130K20AN or those of the photomultiplier. This may result in loss of performance, permanent damage, or both.

**ET Enterprises Limited**  
45 Riverside Way  
Uxbridge UB8 2YF  
United Kingdom  
tel: +44 (0) 1895 200880  
fax: +44 (0) 1895 270873  
e-mail: sales@et-enterprises.com  
web site: www.et-enterprises.com

**ADIT Electron Tubes**  
300 Crane Street  
Sweetwater TX 79556 USA  
tel: (325) 235 1418  
toll free: (800) 399 4557  
fax: (325) 235 2872  
e-mail: sales@electron tubes.com  
web site: www.electrontubes.com

an ISO 9001 and ISO 14001 registered company

The company reserves the right to modify these designs and specifications without notice. Developmental devices are intended for evaluation and no obligation is assumed for future manufacture. While every effort is made to ensure accuracy of published information the company cannot be held responsible for errors or consequences arising therefrom.

**ET Enterprises**  
electron tubes

© ET Enterprises Ltd, 2018  
DS\_HV130K20AN Issue 2 (24/07/18)