




Test Data Sheet

PM10 - SWIR

S/N:

Resonant electro-optic phase modulator

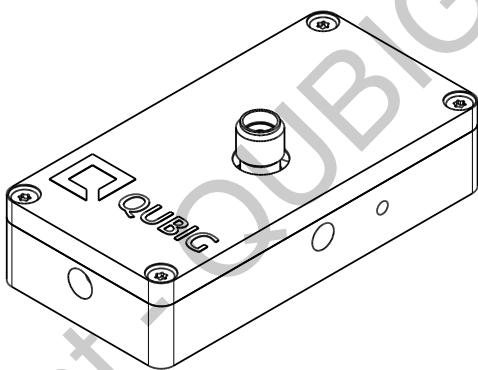

RF properties	Value	Unit
Resonance frequency: f_0 ¹⁾	5205 - 5310	MHz
Preset frequency: f_{set} ¹⁾	5257	MHz
Bandwidth: $\Delta\nu$	20.1	MHz
Quality factor Q	262	
Required RF power for 1 rad @ 1550 nm	38	dBm
max. RF power: RF_{max} ²⁾	5	W

Optical properties		
EO crystal	MLN	
Aperture	$\varnothing 2$	mm
Wavefront distortion (@ 633 nm)	$\lambda/4$	
recommended max. optical intensity (@ 1550 nm)	< 10	W/mm ²
AR coating ($R_{avg} < 1\%$)	1.0 - 1.7	um

¹⁾ at 26.3°C ²⁾ no damage with $RF_{in} < 10W$, but use of a proper heatsink is strongly recommended at high powers

Measured phase modulation

Fig. 1: Oscilloscope trace

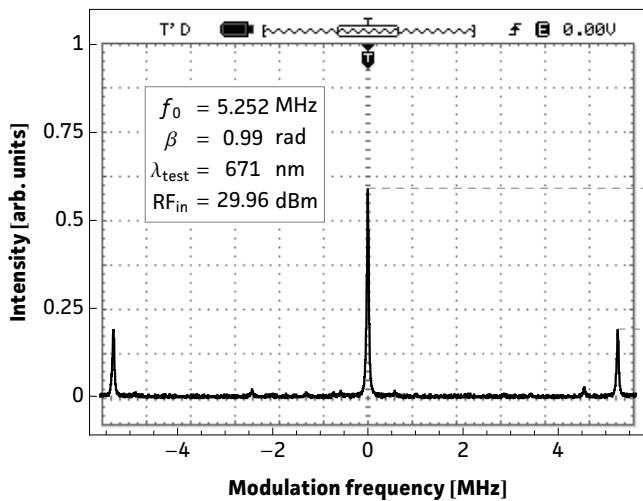


Fig. 2: Carrier/sideband ratio

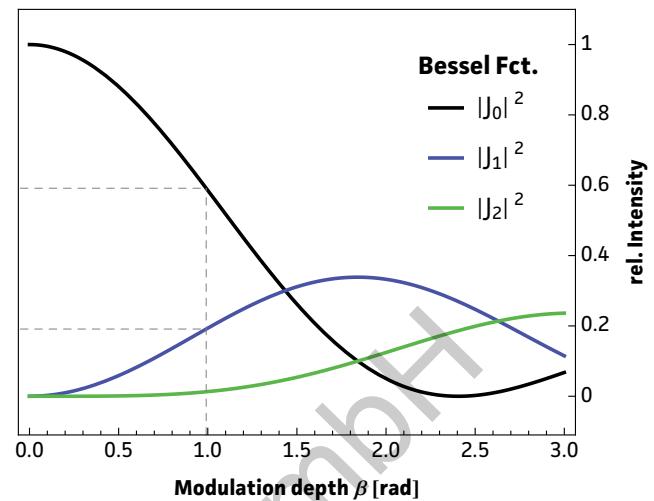


Table 1: Expected modulation

$\beta = 1 \text{ rad}$	unit	λ_1	λ_2	λ_3
λ	nm	671	1064	1550
P	dBm	30.	34.5	38.
P	W	1.01	2.82	6.28
U	V_p	10.	16.8	25.
U_π	V_p	31.6	52.7	78.7
β / U	rad / V	0.1	0.06	0.04

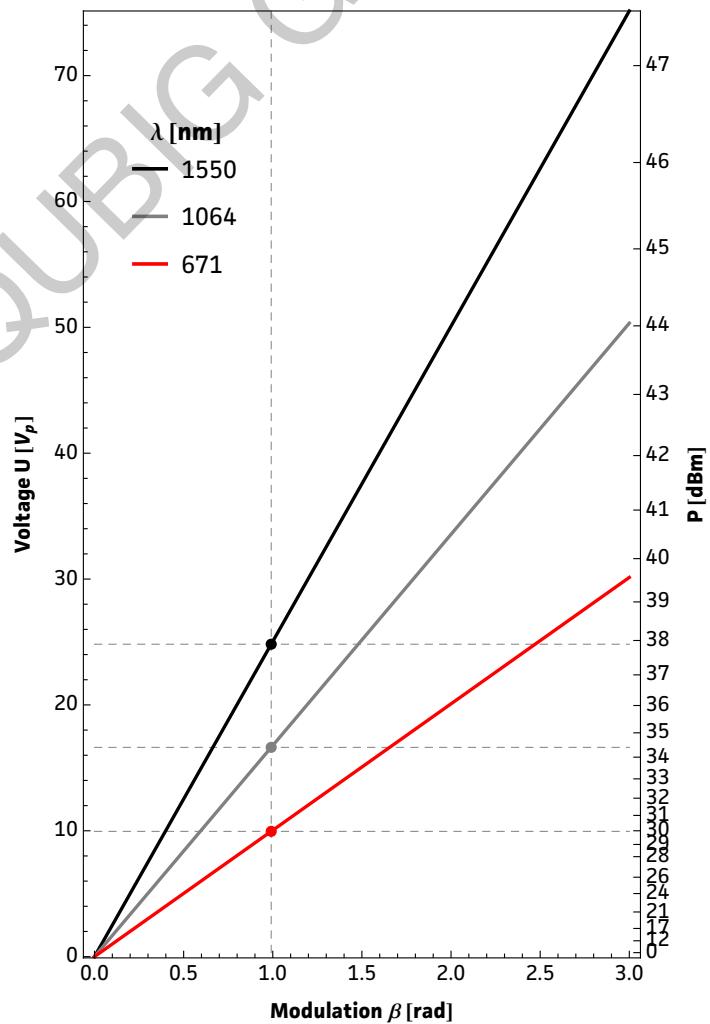


Fig. 1: Recorded oscilloscope trace retrieved from a test setup as illustrated below.

Fig. 2: Squared absolute values of first-kind Bessel functions vs. modulation depth. Vertical lines reveal the ratio between the carrier $|J_0|^2$ and the j^{th} sideband $|J_j|^2$ at a specific β .

Fig. 3: Dependency between RF amplitude and modulation depth for different wavelengths. Points on the curve allow to retrieve either the required RF amplitude for a specific/desired β or the max. achievable modulation depth for a given/available RF power.

Table 1: Expected RF-amplitude/-power values and conversion factors for the required wavelength at the reference modulation depth of 1 rad. Note: Experimentally recorded modulation depth displayed in Fig. 1 might vary from the respective values ($\beta=1\text{rad}$) provided in the table.


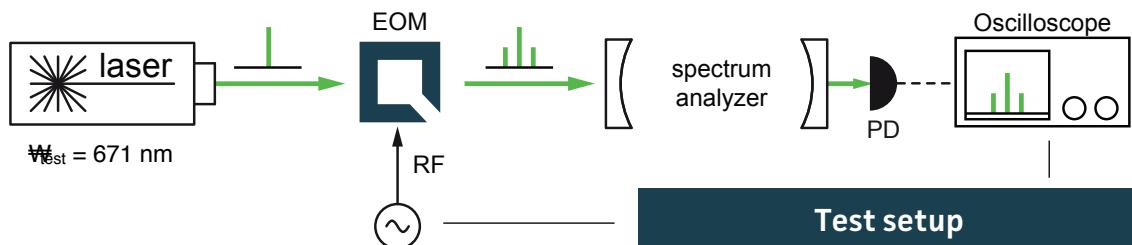



Fig. 3: RF-signal amplitude vs. modulation depth

Resonance characteristics

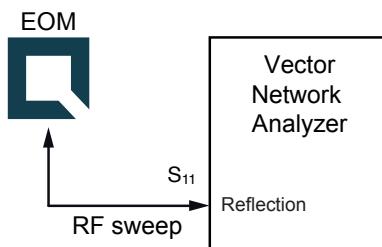

7/12/2018 3:54:44 PM
1311.6010K62-101870-Bu


$T_{EOM} = 26.3 \text{ }^{\circ}\text{C}$

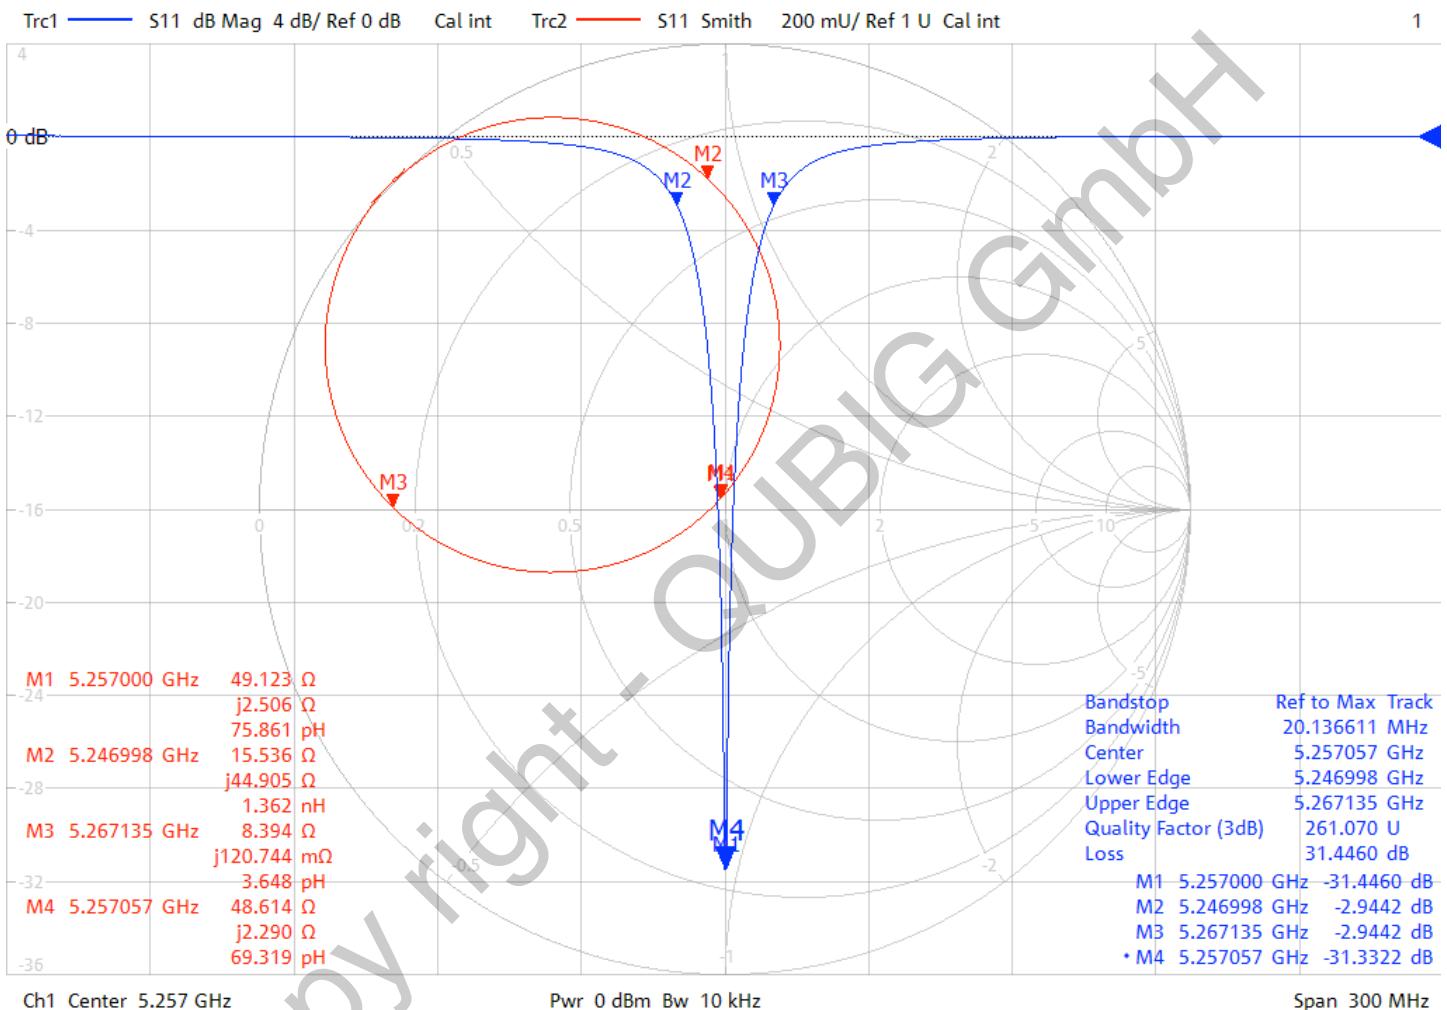


Frequency tuning performance @ $T=26.3 \text{ }^{\circ}\text{C}$

MAX resonance frequency	$f_{0,\max}$	5310	MHz
MIN resonance frequency	$f_{0,\min}$	5205	MHz
number of turns	N_{\max}	13	
tuning range		108	MHz
temperature dependence	df_0/dT	-1.9	MHz/ $^{\circ}\text{C}$

- only use supplied tuning tool
- actuate tuner carefully / do not apply too much torque especially around $f_{0,\max}$
- there might be no hard upper or lower stops (!)

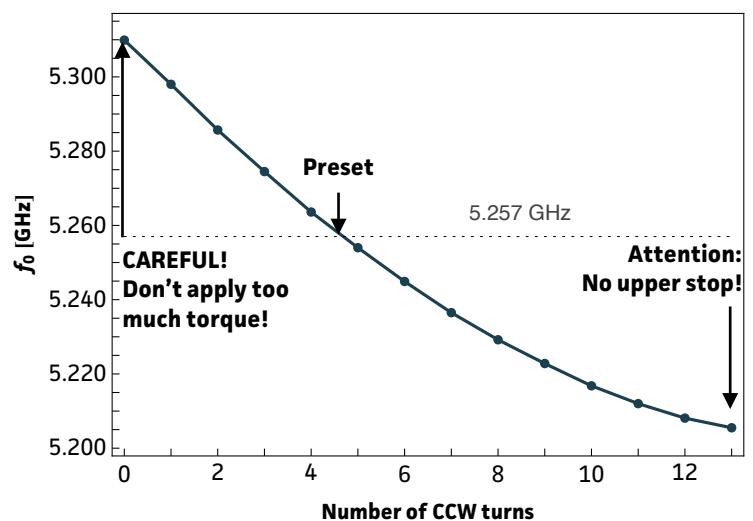

Package drawing

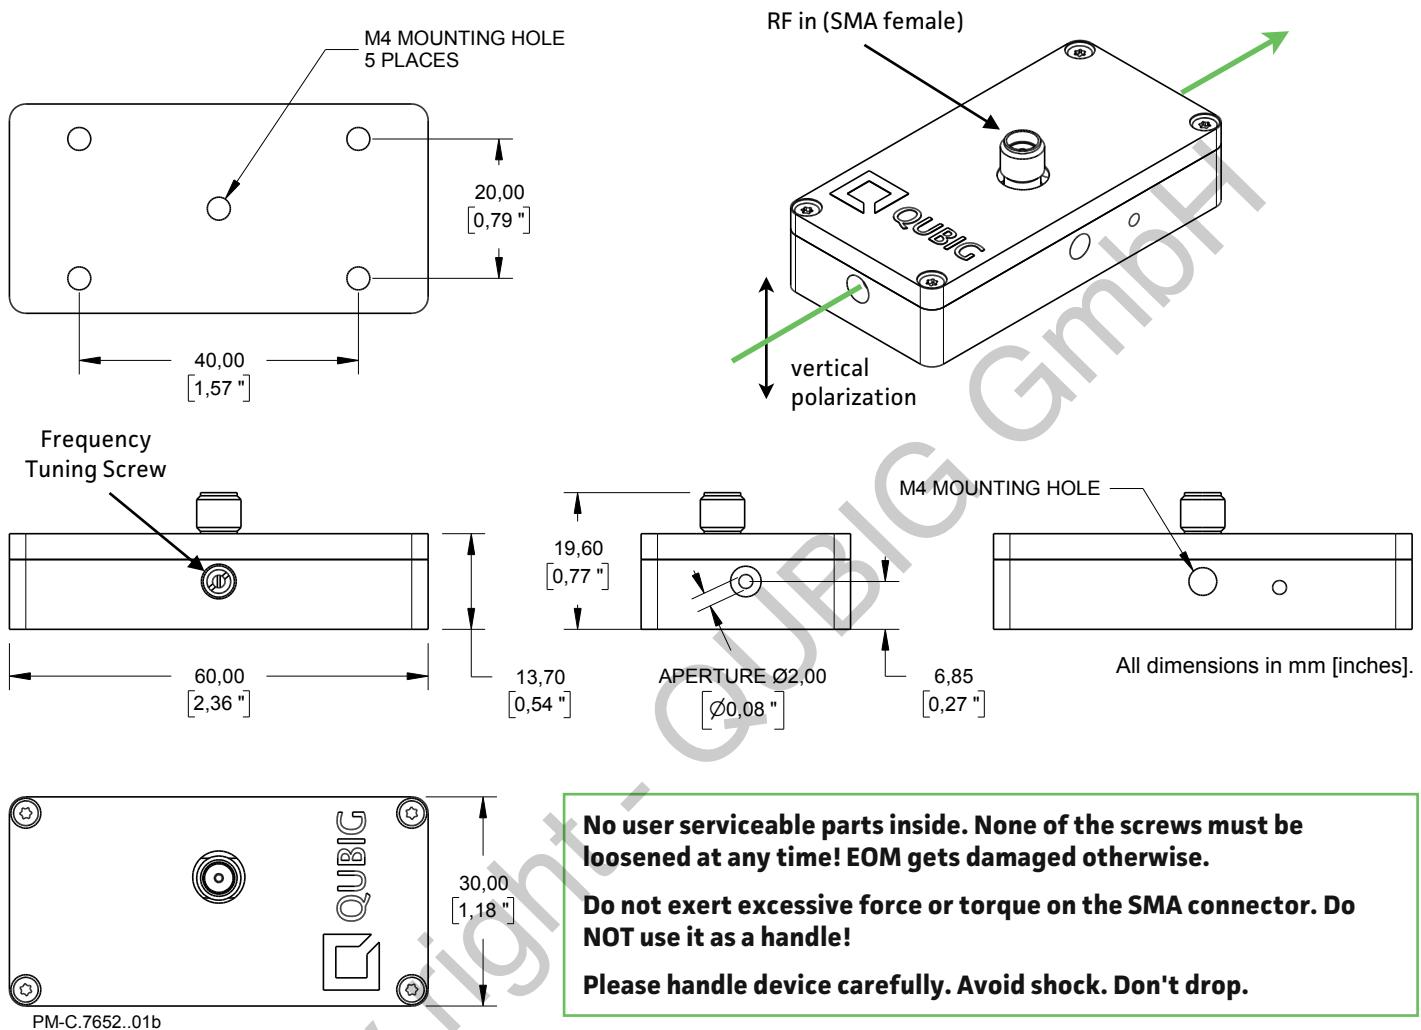

Tested by:

Tel: +49 89 2302 9101
 Fax: +49 89 2302 9102
 eMail: mail@qubig.com
 web: www.qubig.com

Qubig GmbH
 Balanstr. 57
 81451 Munich
 Germany