


High-Speed Balanced Photoreceiver

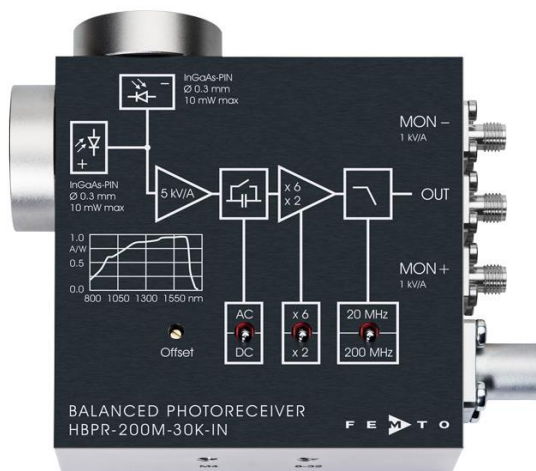


Features

- **Bandwidth DC to 200 MHz**
- **Common-Mode Rejection Ratio (CMRR) 45 dB typ.**
- **InGaAs-PIN detectors, 0.3 mm active diameter**
- **Spectral range 800 - 1700 nm**
- **Very low NEP, down to 4.4 pW/√Hz**
- **Transimpedance gain switchable 10 x 10³ V/A, 30 x 10³ V/A**
- **High dynamic input range up to 2 x 10 mW balanced optical power**
- **Fast monitor outputs with 10 MHz bandwidth and 1 x 10³ V/A gain**
- **Switchable low pass filter for minimizing wideband noise**
- **Free-space input 1.035"-40 threaded, alternatively 25 mm diameter unthreaded**
- **UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread**

Applications

- **Spectroscopy**
- **Heterodyne detection**
- **Optical coherence tomography (OCT)**
- **Optical delay measurement**
- **Differential optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers**

Block Diagram

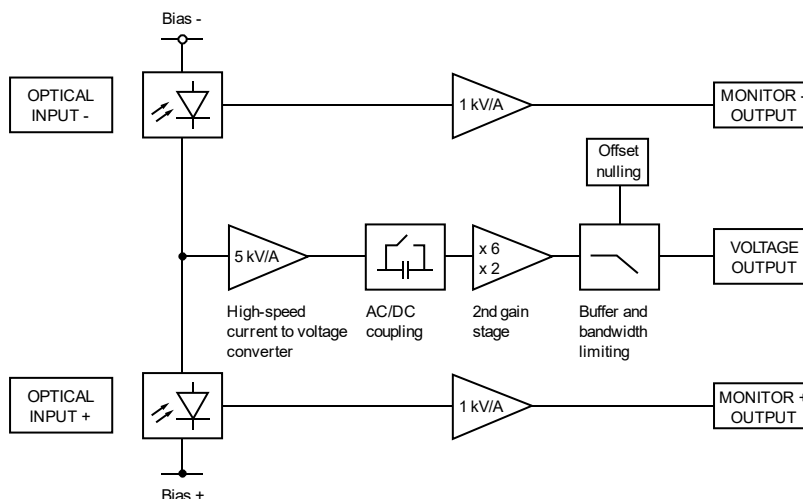

High-Speed Balanced Photoreceiver

Available Input Versions

HBPR-200M-30K-IN-FST



Picture shows two 1.035"-40 threaded flanges with internally threaded coupler rings mounted (outer diameter 30 mm)

1.035"-40 threaded flange for free space applications, compatible with many optical standard accessories.

HBPR-200M-30K-IN-FS



25 mm dia. unthreaded flange for free space applications compatible with many optical standard accessories.

Related Models

Various free space or fiber coupled HBPR models, with bandwidth up to 500 MHz, in the spectral range from 320 nm to 1700 nm are available.

Example: FC input



fix/permanent FC fiber connector for high coupling efficiency, excellent conversion gain accuracy and common mode rejection ratio (CMRR).

See further information and separate datasheets on www.femto.de

Available Accessory

PS-15



power supply,
input: 100 - 240 VAC,
output: ± 15 VDC, +400/-250 mA

Specifications

Test conditions

$V_s = \pm 15$ V, $T_A = 25$ °C, signal output terminated with 50 Ω , Monitor outputs terminated with 1 M Ω

Gain

Transimpedance gain

10×10^3 V/A (2nd gain x2), 10×10^3 V/A (2nd gain x6) switchable (@ 50 Ω load)

Gain accuracy

± 1 % electrical

Conversion gain

9.5×10^3 V/W typ. (@ 2nd gain x2, 1550 nm)
 28.5×10^3 V/W typ. (@ 2nd gain x6, 1550 nm)

Common mode rejection ratio (CMRR)

50 dB typ. ($f \leq 100$ MHz)
45 dB typ. ($f \leq 200$ MHz)

Frequency Response

Lower cut-off frequency

DC / 10 Hz, switchable

Upper cut-off frequency

200 MHz, switchable to 20 MHz

High-Speed Balanced Photoreceiver

Specification (continued)		
Time Response	Rise/fall time (10 % - 90 %)	1.85 ns 17.5 ns (low pass filter 20 MHz)
Input	Noise equivalent power (NEP)	minimum 4.4 pW/√Hz (@ 1550 nm) 4.9 pW/√Hz (@ 1550 nm, 20 MHz) 12.0 pW/√Hz (@ 1550 nm, 100 MHz) 19.0 pW/√Hz (@ 1550 nm, 200 MHz)
	Maximum differential CW power for linear amplification	105 μW (@ 2 nd gain x2, DC-coupled, 1550 nm) 35 μW (@ 2 nd gain x6, DC-coupled, 1550 nm) 500 μW (@ AC-coupled, 1550 nm)
Detector	Max. optical CW balanced power (common mode power)	10 mW (on each photodiode, @ 1550 nm)
	Monitor optical saturation power (limit for linear amplification)	10.5 mW (@ 1550 nm)
	Detector	InGaAs-PIN photodiode
	Active area	Ø 300 μm
	Spectral range	800 - 1700 nm
Signal Output	Sensitivity	0.95 A/W typ. (@ 1550 nm)
	Output voltage range	±1.0 V (@ 50 Ω load) for linear operation and low harmonic distortion
	Max. output voltage	±2.0 V (@ 50 Ω load)
	Offset voltage compensation	±100 mV typ., adjustable by offset potentiometer
	Output impedance	50 Ω (terminate with 50 Ω load)
	Slew rate	2800 V/μs
	Max. output current	70 mA
	Output return loss S22	-30 dB @ < 100 MHz -20 dB @ < 800 MHz
Monitor Outputs	Output noise	2.1 mV _{RMS} (14 mV _{PP}) (@ 2 nd gain x2) 6.0 mV _{RMS} (40 mV _{PP}) (@ 2 nd gain x6) 0.3 mV _{RMS} (2.0 mV _{PP}) typ. (@ 2 nd gain x2, BW: 20 MHz) 0.8 mV _{RMS} (5.2 mV _{PP}) typ. (@ 2 nd gain x6, BW: 20 MHz) (@ 50 Ω load, no signal on detectors, measurement bandwidth 2 GHz)
	Monitor output gain	1 x 10 ³ V/A (@ ≥ 100 kΩ load)
	Monitor output voltage range	0 ... +10 V (@ ≥ 100 kΩ load)
	Monitor output impedance	50 Ω (terminate with ≥ 100 kΩ load)
Input Flange	Monitor output max. output current	30 mA typ.
	Monitor output bandwidth	DC ... 10 MHz
	Monitor output noise	0.6 mV _{RMS} (4 mV _{PP}) (@ 100 kΩ load, no signal on detectors, measurement bandwidth 200 MHz)
	Material	1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)

High-Speed Balanced Photoreceiver

Specification (continued)

Coupler Ring
(FST version only)

Material 1.4305 stainless steel, glass bead blasted

Power Supply

Supply voltage $\pm 15\text{ V}$ ($\pm 14.5\text{ V} \dots \pm 16.5\text{ V}$)
Supply current $-90 / +120\text{ mA}$ (depends on operating conditions, recommended power supply capability min. $\pm 200\text{ mA}$)

Case

Weight 350 g (0.77 lbs)
Material AlMg3Mn, nickel-plated

Temperature Range

Storage temperature $-40 \dots +85\text{ }^{\circ}\text{C}$
Operating temperature $0 \dots +60\text{ }^{\circ}\text{C}$

Absolute Maximum Ratings


Max. CW power (averaged) 12 mW (on each photodiode)
Power supply voltage $\pm 20\text{ V}$

Connectors

Input
FS version 25 mm dia. unthreaded flange for free space applications
FST version 1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories

Output SMA jack (female)

Power supply Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)



Pin 1: $+15\text{ V}$
Pin 2: -15 V
Pin 3: GND

Scope of Delivery

HBPR-200M-30K-IN, 2 x threaded coupler ring (FST version only), Lemo® 3-pin connector, 3 x adapter SMA (male) to BNC (female), datasheet


Ordering Information

HBPR-200M-30K-IN-FS 25 mm dia. unthreaded flange for free space applications

HBPR-200M-30K-IN-FST 1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories


High-Speed Balanced Photoreceiver

Spectral Responsivity

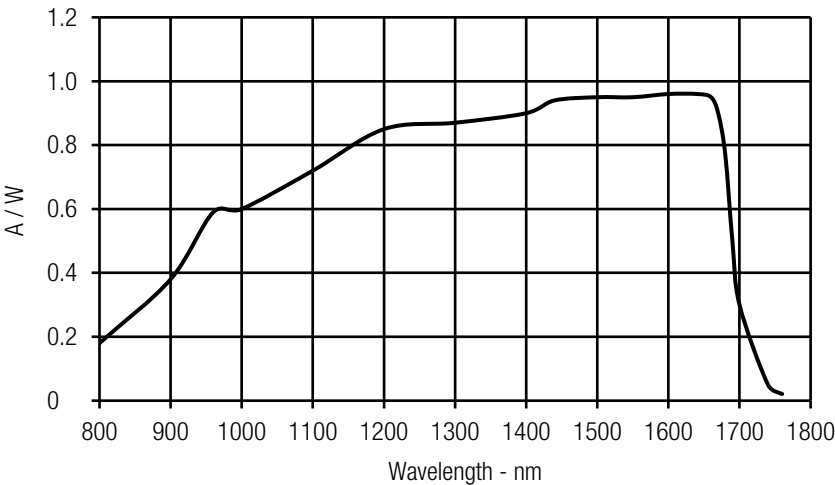


Detector Position

HBPR-200M-30K-IN-FST (1.035"-40 threaded free space input)

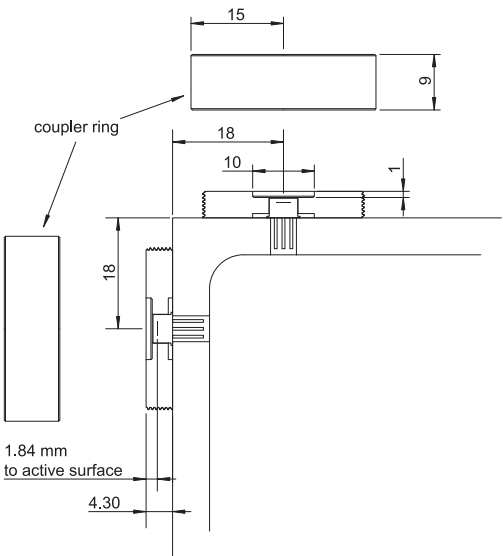


HBPR-200M-30K-IN-FS (25 mm dia. unthreaded free space input)

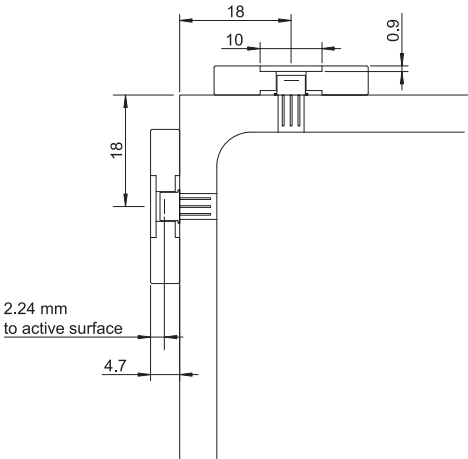

High-Speed Balanced Photoreceiver

Dimensions

Case dimensions for HBPR-200M-30K-IN (FS/FST model):

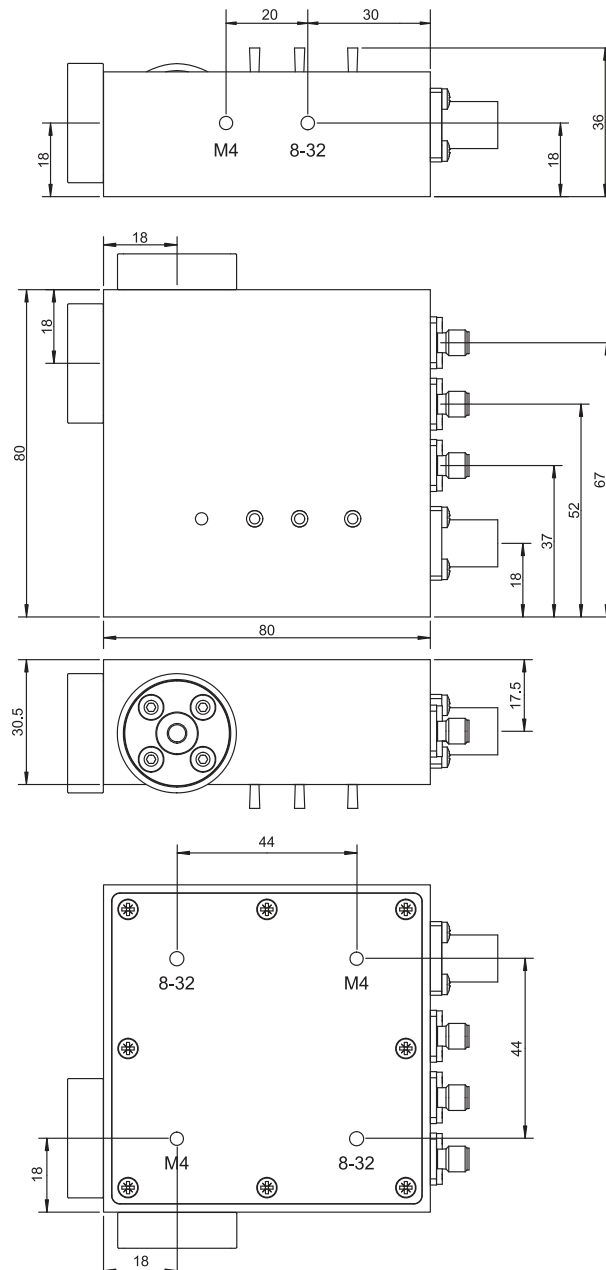

All measures in mm unless otherwise noted.

The bottom plate may be rotated to match the appropriate mounting thread to the optical axis by unscrewing the 8 screws.

FEMTO Messtechnik GmbH
Klosterstr. 64
10179 Berlin · Germany
Phone: +49 30 280 4711-0
Fax: +49 30 280 4711-11
Email: info@femto.de
www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany