

29 mm (1.13") photomultiplier

9402B series data sheet

1 description

The 9402B is a 29 mm (1.13") diameter, end window photomultiplier with magnesium fluoride window, caesium telluride photocathode and 11 BeCu dynodes of linear focused design for extended linearity.

It is supplied with spectral response data at specific wavelengths in the vacuum ultra-violet and with photon counting plateau curves showing the recommended voltage for photon counting applications.

2 applications

- fluorescence studies down to 110 nm
- measurement of synchrotron radiation down to 110 nm
- measurement of uv light in the presence of visible light

3 features


- sensitive to vacuum ultra-violet
- does not respond to visible light (solar blind)

4 window characteristics

	9402B borosilicate
spectral range (nm)*	110 - 360
refractive index (n _s)	1.38

* wavelength range over which quantum efficiency exceeds 1 % of peak

5 typical spectral response curves

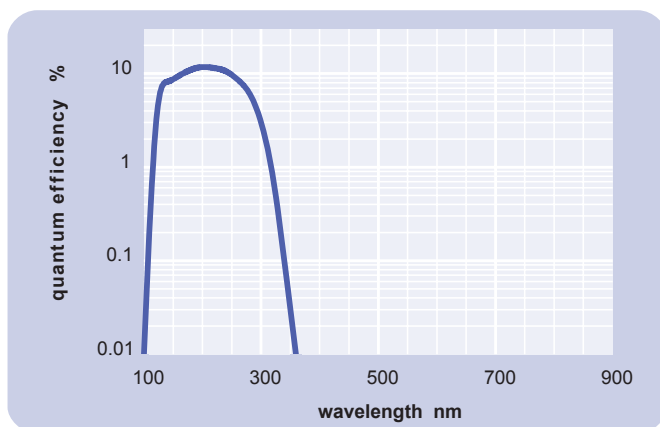


6 characteristics

	unit	min	typ	max
photocathode: CsTe				
active diameter	mm		25	
quantum efficiency at peak	%	7	12	
dynodes: 11LFBcCu				
anode sensitivity in divider A:				
volts for 10 ⁶ gain	V		1500	
volts for 10 ⁷ gain	V		2000	3000
dark current at 20 °C:				
dc at 10 ⁷ gain	nA		0.5	5
dark count rate	s ⁻¹		150	500
pulsed linearity (-5% deviation):				
rate effect (I _a for Δg/g=1%):	μA		1	
magnetic field sensitivity:				
the field for which the output decreases by 50 %				
most sensitive direction	T x 10 ⁻⁴		1.6	
temperature coefficient:				
	% °C ⁻¹		± 0.5	
timing:				
single electron rise time	ns		4.5	
single electron (fwhm)	ns		7.5	
transit time	ns		33	
weight:				
	g		50	
maximum ratings:				
anode current	μA			100
cathode current	nA			10
gain	x 10 ⁶			20
temperature	°C	-180		60
V (k-a) ⁽¹⁾	V			3000
V (k-d1)	V			500
V (d-d) ⁽²⁾	V			300
ambient pressure (absolute)	kPa			202

⁽¹⁾ subject to not exceeding max. rated sensitivity ⁽²⁾ subject to not exceeding max rated V(k-a)


7 typical voltage gain characteristics

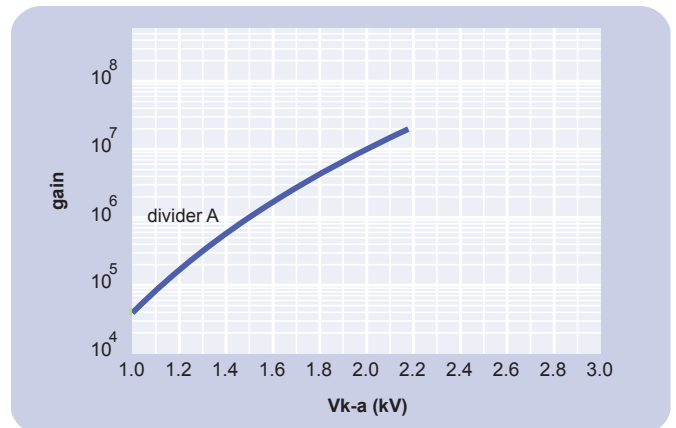

8 voltage divider distribution

k	d ₁	d ₂	d ₈	d ₉	d ₁₀	d ₁₁	a	
A	2R	R	R	R	R	R	R	Standard

9 external dimensions mm

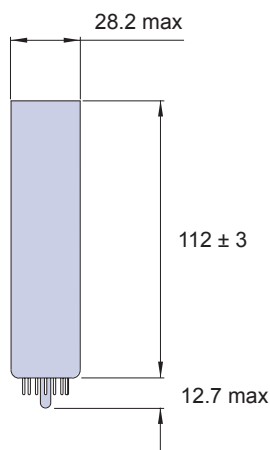

13 ordering information

The 9402B meets the specification given in this data sheet. You may order **variants** by adding a suffix to the type number. You may also order **options** by adding a suffix to the type number. You may order product with **specification options** by discussing your requirements with us. If your selection option is for one-off order, then the product will be referred to as 9402A. For a repeat order, ET Enterprises will give the product a two digit suffix after the letter B, for example B21. This identifies your specific requirement.

9402


options

- E** electrostatic shielding
see drawing below
- S** electromagnetic shielding
see drawing below

specification options

- B** as given in data sheet
- A** single order to selected specification
- Bnn** repeat order to selected specification

10 base configuration (viewed from below)



'ic' indicates an internal connection


Our range of B14B sockets, available for this series, includes versions with or without a mounting flange, and versions with contacts for mounting directly onto printed circuit boards.

11 high voltage caution

To avoid arc discharges between the photocathode and nearby grounded surfaces apply the HV only after hard vacuum has been attained, that is when the pressure is less than 10^{-3} torr. Failure to observe this precaution will destroy the pmt and invalidate the warranty.

12 handling instructions

The window of this pmt has been specially cleaned to give maximum efficiency. It should not be touched with fingers or allowed to come into contact with oil or grease. The window can be cleaned with isopropyl alcohol to remove oil deposits.

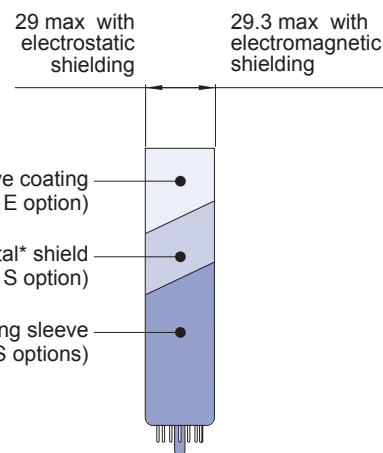

14 voltage dividers

The standard voltage dividers available for these pmts are tabulated below:

	k	d ₁	d ₂	d ₇	d ₈	d ₉	d ₁₀	d ₁₁	a
C670G	2R	R		R	R	R	R	R	
C670H	2R	R		R	R	R	2R	4R	

R = 1.2MΩ

*mumetal is a registered trademark of Magnetic Shield Corporation

ET Enterprises Limited
45 Riverside Way
Uxbridge UB8 2YF
United Kingdom
tel: +44 (0) 1895 200880
fax: +44 (0) 1895 270873
e-mail: sales@et-enterprises.com
web site: www.et-enterprises.com

ADIT Electron Tubes
300 Crane Street
Sweetwater TX 79556 USA
tel: (325) 235 1418
toll free: (800) 399 4557
fax: (325) 235 2872
e-mail: sales@electron tubes.com
web site: www.electrontubes.com

choose accessories for this pmt on our website

an ISO 9001 registered company

The company reserves the right to modify these designs and specifications without notice. Developmental devices are intended for evaluation and no obligation is assumed for future manufacture. While every effort is made to ensure accuracy of published information the company cannot be held responsible for errors or consequences arising therefrom.

