

# 51 mm (2") photomultiplier

## 9214B series data sheet

### 1 description

The 9214B is a 51mm (2") diameter, end window photomultiplier with blue-green sensitive bialkali photocathode and 12 high gain, high stability, SbCs dynodes of linear focused design .

### 2 applications

- photon counting of bio-and chemi-luminescent samples
- SO<sub>x</sub> NO<sub>x</sub> pollution monitoring
- high energy physics studies
- LIDAR

### 3 features


- high gain
- low operating voltage
- good SER
- low rate effect

### 4 window characteristics

	9214B borosilicate
spectral range *(nm)	290 - 630
refractive index (n <sub>d</sub> )	1.49
K (ppm)	300
Th (ppb)	250
U (ppb)	100

\* wavelength range over which quantum efficiency exceeds 1 % of peak

### 5 typical spectral response curves

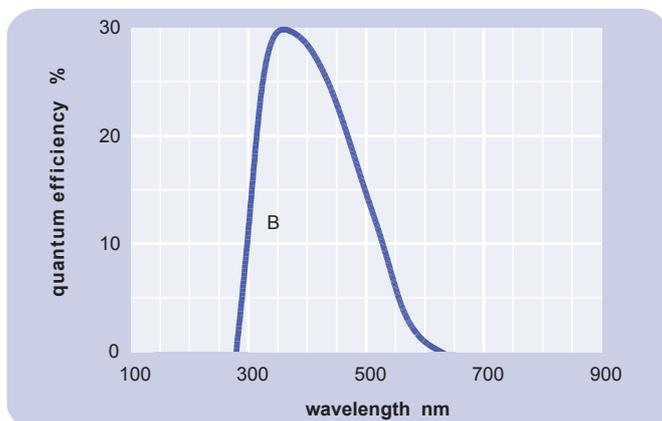


### 6 characteristics

	unit	min	typ	max
<b>photocathode: bialkali</b>				
active diameter	mm		46	
quantum efficiency at peak	%		30	
luminous sensitivity	μA/lm		70	
with CB filter		8	11.5	
with CR filter			2	
<b>dynodes: 12LFSbCs</b>				
<b>anode sensitivity in divider A:</b>				
nominal anode sensitivity	A/lm		500	
max. rated anode sensitivity	A/lm		2000	
overall V for nominal A/lm	V		1250	1800
overall V for max. rated A/lm	V		1450	
gain at nominal A/lm	x 10 <sup>6</sup>		7	
<b>dark current at 20 °C:</b>				
dc at nominal A/lm	nA		1	10
dc at max. rated A/lm	nA		4	
dark count	s <sup>-1</sup>		300	
<b>pulsed linearity (-5% deviation):</b>				
divider A	mA		30	
divider B	mA		100	
<b>pulse height resolution:</b>				
single electron peak to valley	ratio		2	
<b>rate effect (I<sub>a</sub> for Δg/g=1%):</b>				
	μA		20	
<b>magnetic field sensitivity:</b>				
the field for which the output decreases by 50 %				
most sensitive direction	T x 10 <sup>-4</sup>		1	
<b>temperature coefficient:</b>				
temperature coefficient:	% °C <sup>-1</sup>		± 0.5	
<b>timing:</b>				
single electron rise time	ns		2	
single electron fwhm	ns		3	
single electron jitter (fwhm)	ns		2.2	
multi electron rise time	ns		3	
multi electron fwhm	ns		4.5	
transit time	ns		45	
	g		160	
<b>weight:</b>				
	g		160	
<b>maximum ratings:</b>				
anode current	μA			100
cathode current	nA			100
gain	x 10 <sup>6</sup>			30
sensitivity	A/lm			2000
temperature	°C	-30		60
V (k-a) <sup>(1)</sup>	V			2300
V (k-d1)	V			500
V (d-d) <sup>(2)</sup>	V			450
ambient pressure (absolute)	kPa			202

<sup>(1)</sup> subject to not exceeding max. rated sensitivity <sup>(2)</sup> subject to not exceeding max rated V(k-a)

### 7 typical voltage gain characteristics

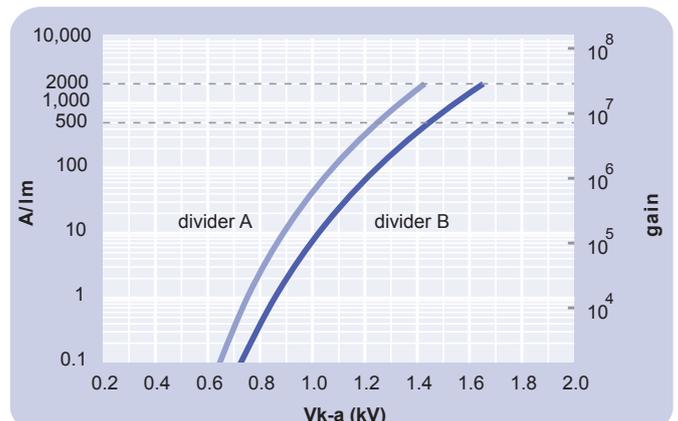

## 8 voltage divider distribution


	k	d <sub>1</sub>	d <sub>2</sub>	.....	d <sub>8</sub>	d <sub>9</sub>	d <sub>10</sub>	d <sub>11</sub>	d <sub>12</sub>	a	
A	300V	R	.....		R	R	R	2R	R		Standard
B	300V	R	.....		R	1.25R	1.5R	2R	3R		High Pulsed linearity

note: focus connected to d<sub>1</sub>


Characteristics contained in this data sheet refer to divider A unless stated otherwise.

## 9 external dimensions mm

The drawings below show the 9214B in hardpin format and the 9214KB with the B20 cap fitted.

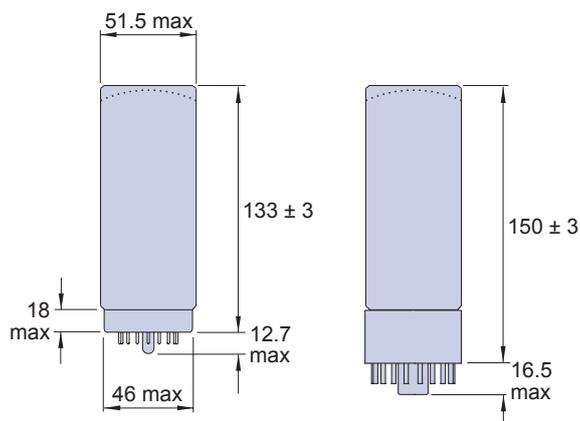


## 10 base configuration (viewed from below)



B19A hardpin base  
(for 9214B)

'ic' indicates an internal connection





B20 cap  
(for 9214KB)

'ic' indicates an internal connection

Our range of B19A sockets is available to suit the hardpin base. Our range of B20 sockets is available to suit the B20 cap. Both socket ranges include versions with or without a mounting flange, and versions with contacts for mounting directly onto printed circuit boards.

## 11 ordering information

The 9214B meets the specification given in this data sheet. You may order **variants** by adding a suffix to the type number. You may also order **options** by adding a suffix to the type number. You may order product with **specification options** by discussing your requirements with us. If your selection option is for one-off order, then the product will be referred to as 9214A. For a repeat order, ET Enterprises will give the product a two digit suffix after the letter B, for example B21. This identifies your specific requirement.

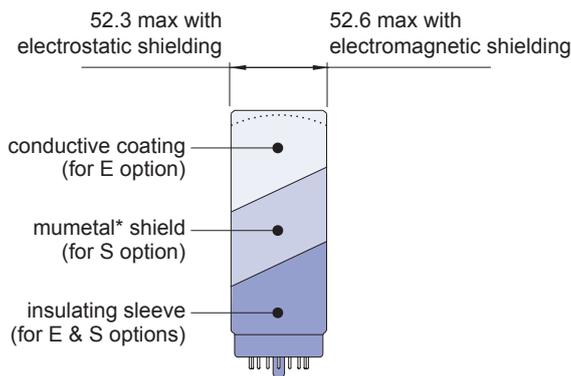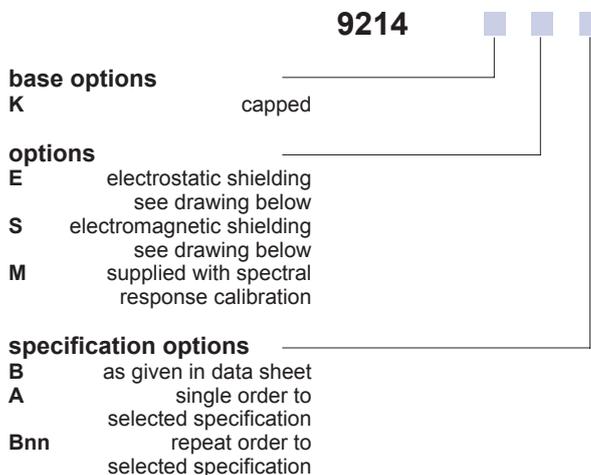

## 12 voltage dividers

The standard voltage dividers available for these pmts are tabulated below:

9214B	9214KB	k	d <sub>1</sub>	d <sub>2</sub>	.....	d <sub>8</sub>	d <sub>9</sub>	d <sub>10</sub>	d <sub>11</sub>	d <sub>12</sub>	a
C638A	C640A	3R	R	.....		R	R	R	R	R	
C638B	C640B	3R	R	.....		R	1.25R	1.5R	2R	3R	
C638C	C640C	300 V	R	.....		R	R	R	R	R	
C638D	C640D	300 V	R	.....		R	1.25R	1.5R	2R	3R	

R = 330 kΩ

\*mumetal is a registered trademark of Magnetic Shield Corporation

**ET Enterprises Limited**  
45 Riverside Way  
Uxbridge UB8 2YF  
United Kingdom  
tel: +44 (0) 1895 200880  
fax: +44 (0) 1895 270873  
e-mail: sales@et-enterprises.com  
web site: www.et-enterprises.com

**ADIT Electron Tubes**  
300 Crane Street  
Sweetwater TX 79556 USA  
tel: (325) 235 1418  
tel free: (800) 399 4557  
fax: (325) 235 2872  
e-mail: sales@electrontubes.com  
web site: www.electrontubes.com

choose accessories for this pmt on our website

an ISO 9001 registered company

The company reserves the right to modify these designs and specifications without notice. Developmental devices are intended for evaluation and no obligation is assumed for future manufacture. While every effort is made to ensure accuracy of published information the company cannot be held responsible for errors or consequences arising therefrom.



© ET Enterprises Ltd, 2010  
DS\_ 9214B Issue 9 (01/09/10)