

# AlGaInP Visible Laser Diode

ADL-65074GL

6-2D-LD65-010\_Rev.01

**650nm 7mW 85 °C**

**High Temperature, Reliable Operation!**

• Features


1. High temperature operation
2. Higher power
3. High reliability

• Applications

1. Automobile DVD
2. Bar code readers
3. High reliability laser instrument

• Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P <sub>O</sub>	CW	10	mW
Reverse voltage (LD)	V <sub>RL</sub>	-	2	V
Reverse voltage (PD)	V <sub>RD</sub>	-	30	V
Forward current (PD)	I <sub>FD</sub>	-	10	mA
Case temperature	T <sub>C</sub>	-	-10~+85	°C
Storage temperature	T <sub>S</sub>	-	-40~+85	°C

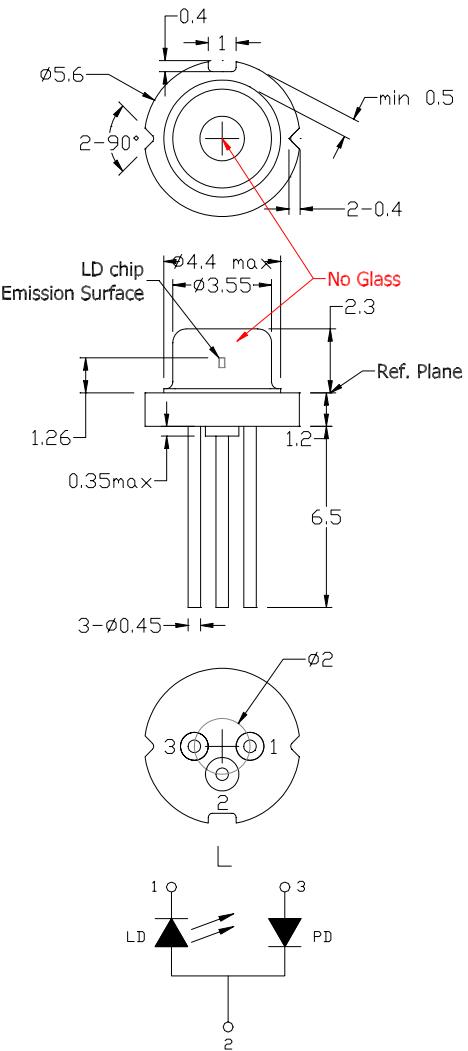

• Electrical and optical characteristics ( $T_c=25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength		645	655	660	nm	$P_o=7\text{mW}$
Threshold current	I <sub>th</sub>	-	20	30	mA	
Operating current	I <sub>op</sub>	-	30	40	mA	$P_o=7\text{mW}$
Operating voltage	V <sub>op</sub>	-	2.2	2.5	V	$P_o=7\text{mW}$
Differential efficiency		0.65	0.85	1.1	mW/mA	$P_o=3\text{-}5\text{mW}$
Monitor current	I <sub>m</sub>	0.1	0.2	0.3	mA	$P_o=7\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	//	6	8.5	12	deg	
Perpendicular divergence angle		25	29	32	deg	
Parallel FFP deviation angle	//	-3	0	+3	deg	$P_o=7\text{mW}$
Perpendicular FFP deviation angle		-3	0	+3	deg	
Emission point accuracy	x y z	-80	0	+80	um	

• Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.







\* For reference only. Contents above are subject to change without notice.

**Arima**  
LASERS

# **AlGaInP Visible Laser Diode**

**ADL-65074GL**

**6-2D-LD65-010\_Rev.01**

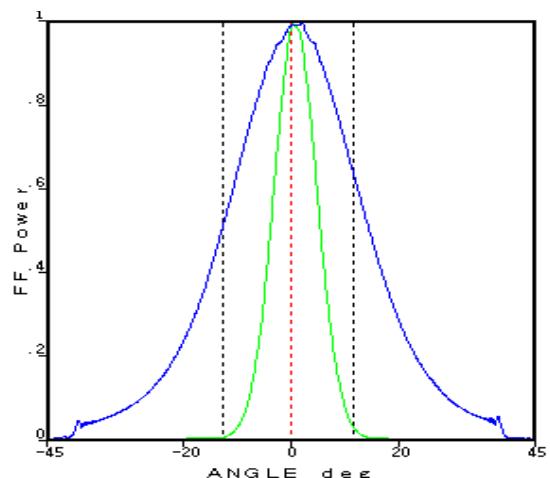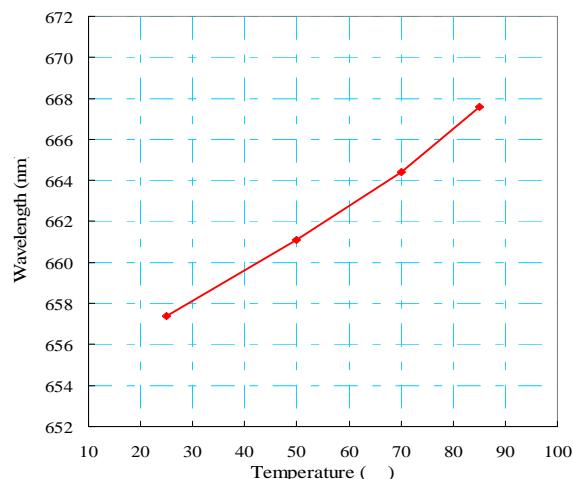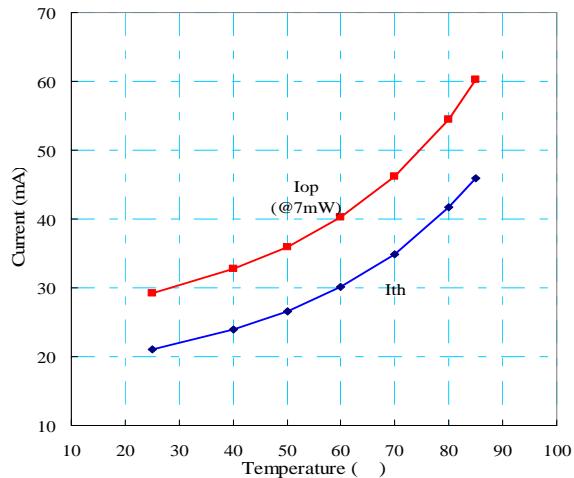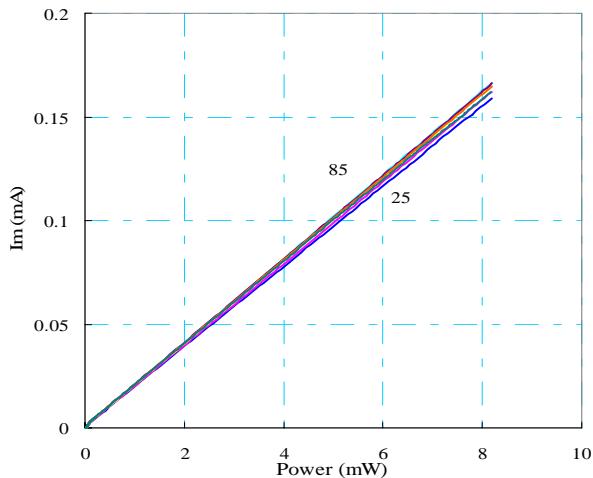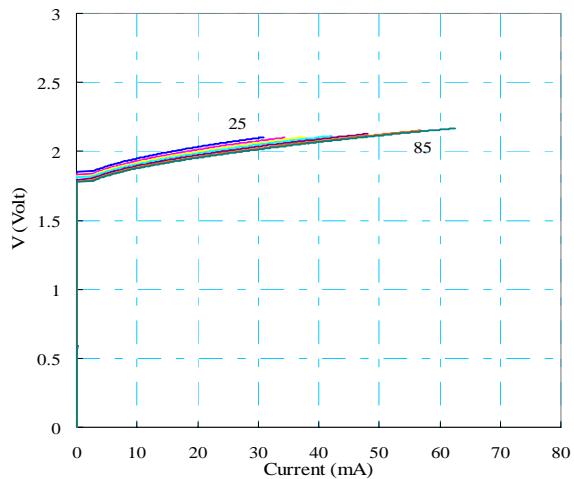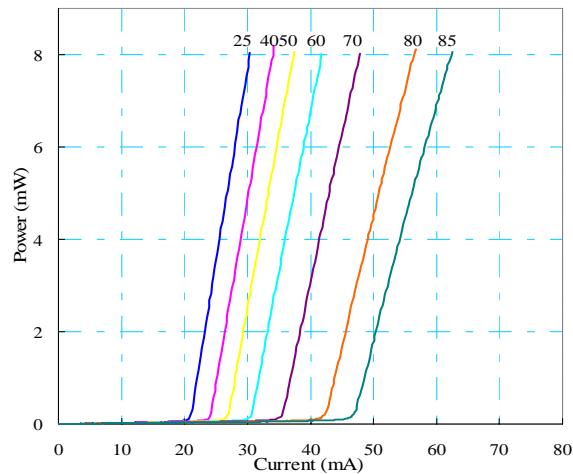

\* For reference only. Contents above are subject to change without notice.

**Arima**  
LASERS