

## AlGaInP | Visible Laser Diode

ADL-63301TL

635nm 30mW 40°C Reliable Operation

6-2D-LD63-061 Rev.03

### Features

High visibility  
High ESD Level

### Applications

Industrial laser markers  
Survey and engineering instruments  
High visibility LD display  
Lighting show

### Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_O$	CW	35	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Reverse voltage (PD)	$V_{RD}$	-	30	V
Forward current (PD)	$I_{FD}$	-	10	mA
Case temperature	$T_C$	-	-10~+40	°C
Storage temperature	$T_S$	-	-40~+85	°C


### Electrical and optical characteristics ( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	630	640	645	nm	$P_O=30\text{ mW}$
Threshold current	$I_{th}$	-	50	70	mA	
Operating current	$I_{op}$	-	100	120	mA	$P_O=30\text{ mW}$
Operating voltage	$V_{op}$	-	2.3	2.7	V	$P_O=30\text{ mW}$
Differential efficiency	$\eta$	0.3	0.6	1.2	mW/mA	$P_O=25\text{-}30\text{mW}$
Monitor current	$I_m$	0.1	0.25	0.5	mA	$P_O=30\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{//}$	5	8	12	deg.	$P_O=30\text{ mW}$
Perpendicular divergence angle	$\theta_{\perp}$	25	33	38	deg.	
Parallel FFP deviation angle	$\Delta\theta_{//}$	-3	0	+3	deg.	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	0	+3	deg.	
Emission point accuracy	$\Delta x\Delta y\Delta z$	-80	0	+80	um	

### • Precautions

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

*For reference only. Contents above are subject to change without notice.*






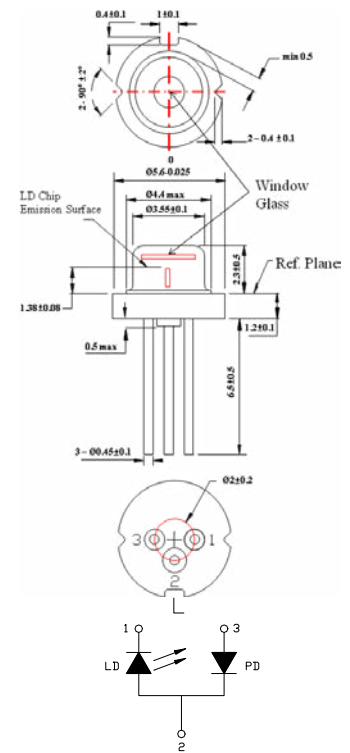


# AlGaInP | Visible Laser Diode

ADL-63301TL

6-2D-LD63-061 Rev.03

## 635nm 30mW 40°C Reliable Operation

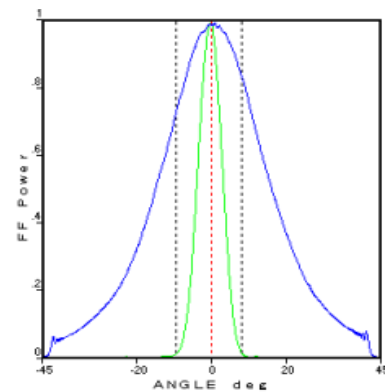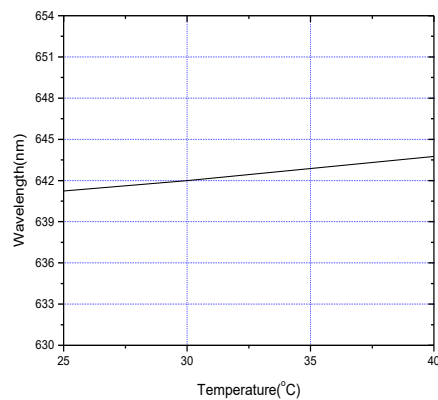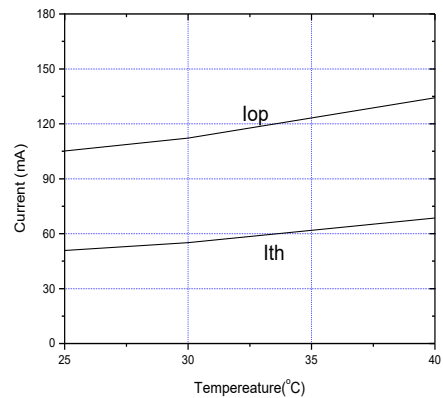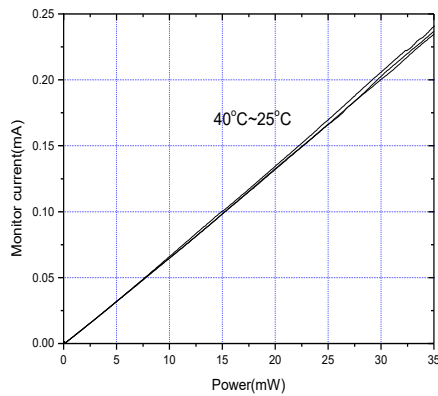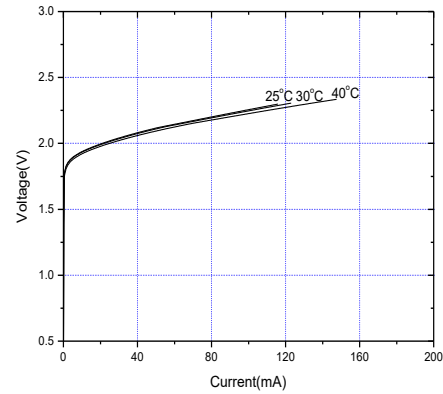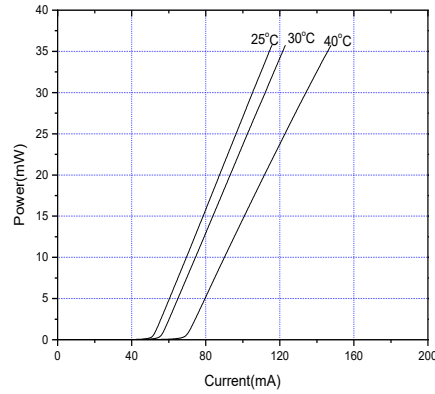

*For reference only. Contents above are subject to change without notice.*