

DFB Laser Diode 1940nm 15mW

FNPL-15S-1940-DFB



FNPL-15S-1940-DFB is a CW DFB semiconductor laser diode. It is delivered in standard SOT-148 and TO-56 packages with optional monitor diode to stabilize power output and TO-5 and TO-8 packages with integrated TEC, thermistor and monitor diode. Custom mounts are available upon request.

Key Features

Excellent reliability
Variety of packaging options

Applications


High performance gas sensing
Gas Sensing
Sensing of liquids
Free space communications
Spectroscopy

Optical and electrical characteristics: (T = 25 °C)

| Operating parameters | Symbol | Min | Typ | Max | Unit |
|-------------------------------|------------------|-----|------|-----|-------|
| Optical output power | P_{out} | - | 15 | - | mW |
| Lasing wavelength | λ | - | 1940 | - | nm |
| Threshold current | I_{th} | - | 29 | - | mA |
| Forward current | I_f | - | 100 | 120 | mA |
| Operating Voltage | | - | - | 1 | V |
| Beam divergence parallel | $\Theta_{ }$ | | 30 | | deg. |
| Beam divergence perpendicular | Θ_{\perp} | | 50 | | deg. |
| Side mode suppression | | - | 35 | - | dB |
| Slope efficiency | dP_o/dI_{op} | | 0.25 | | mW/mA |
| Operating temperature | T_c | | +25 | | °C |
| Storage temperature | T_s | -20 | | +85 | °C |

TYPICAL PERFORMANCE

Room Temperature CW Spectrum at 1940nm

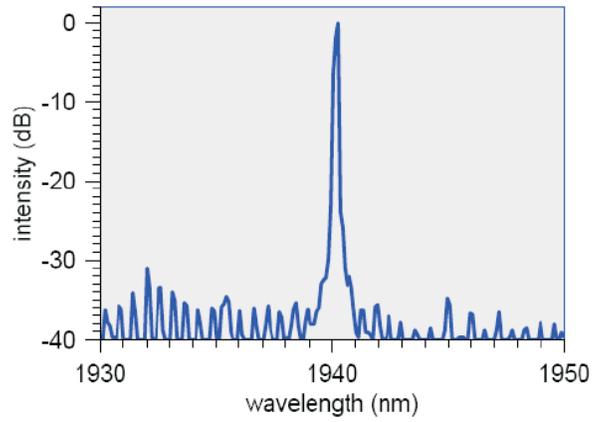

Power against Operating Current

