

DFB Laser Diode 1064nm 20mW

FNPL-20S-1064-DFB



FNPL-20S-1064-DFB is a CW DFB semiconductor laser diode operating at 1064nm. It is delivered in standard TO-5.6 and TO-9 packages with optional monitor diode to stabilize power output and TO-5 and butterfly packages with integrated TEC, thermistor and monitor diode. Custom mounts are available upon request.

Key Features

- Very high spectral purity
- Narrow Line width <3MHz
- Excellent reliability
- Variety of packaging options

Applications


- High performance gas sensing
- Precision metrology
- Atomic clocks
- Spectroscopy
- Space technology

Optical and electrical characteristics:

Operating parameters	Symbol	Min	Typ	Max	Unit
Optical Output Power	P_{out}		20		mW
Lasing Wavelength	λ	1063	1064	1065	nm
Threshold Current	I_{th}	15	20	25	mA
Forward Current	I_f		50		mA
Operating Voltage	V_{op}		2		V
Beam Divergence Parallel	Θ_{\parallel}	12	15	20	deg.
Beam Divergence Perpendicular	Θ_{\perp}	35	40	45	deg.
Emitting Area	WxH	2.3x1.4	2.5x1.5	2.5x1.7	μm
Slope Efficiency	dP_o/dI_{op}	0.35	0.4	0.5	mW/mA
Temp. Tuning Coefficient	C_T	0.07	0.08	0.09	nm/K
Current Tuning Coefficient	C_I	0.015	0.02	0.025	nm/mA
Operating Temperature	T_c	-20		+50	°C
Storage Temperature	T_s	-40		+80	°C

TYPICAL PERFORMANCE

Room Temperature CW Spectrum at 1064nm

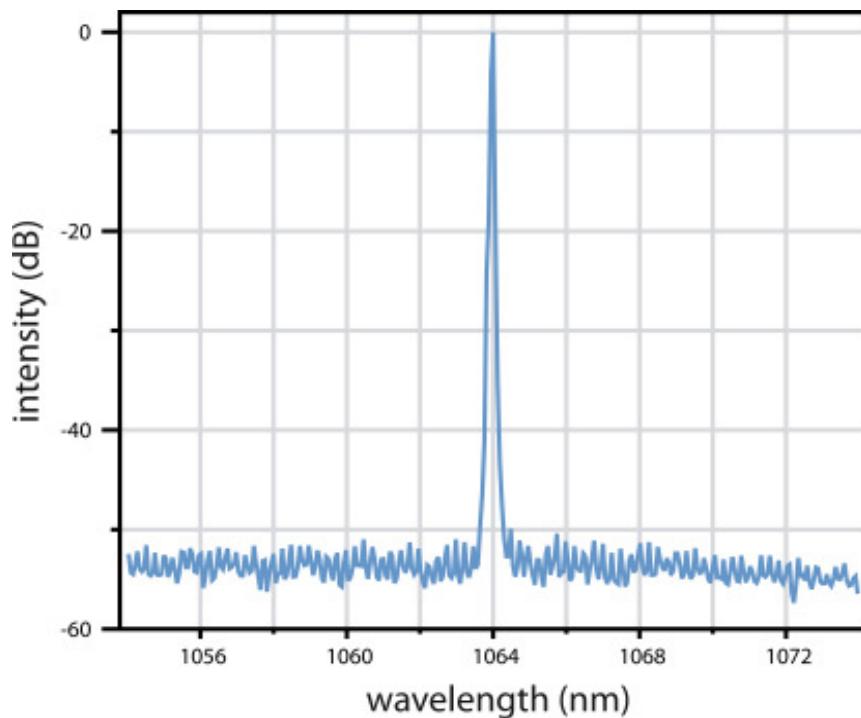

Mode-hop Free Wavelength Current Tuning at Different Wavelengths

