


520/60 nm BrightLine® single-band bandpass filter

Part Number: FF01-520/60-25

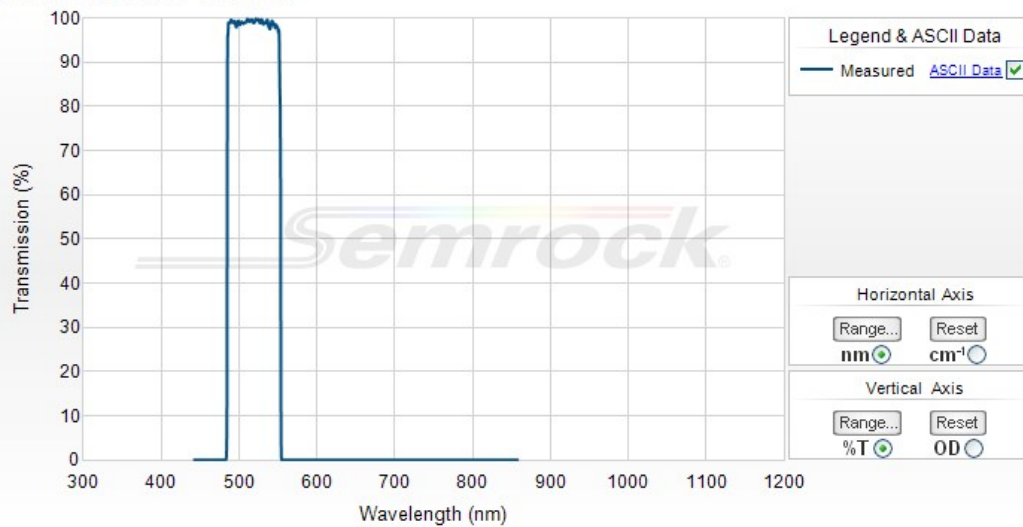

Semrock
A Unit of **IPX** Corporation

Semrock, Inc

3625 Buffalo Road, Suite 6
Rochester, New York 14624

Main Phone: +1 585.594.7050 (worldwide)
Toll Free Phone: 866.736.7625 (866-SEMROCK)
(within US and Canada)

Your filter spectrum may differ slightly from the typical spectrum above, but is certified to meet the optical specifications noted below.



520/60 nm BrightLine® single-band bandpass filter

Individual fluorescence bandpass filters that have been optimized for use in a variety of fluorescence instruments. All thin-film, hard-coated construction for unsurpassed performance and reliability.

| Part Number | Size | Price ¹ | Stock Status |
|----------------|----------------|--------------------|--------------|
| FF01-520/60-25 | 25 mm x 3.5 mm | \$405 | In Stock |

Don't see a size you need? Contact us for custom sizing – available in less than a week (sizing fee applies).

1) US domestic pricing only. If you are ordering from outside the US, please contact your nearest [regional distributor](#) for the correct list price.

Optical Specifications

| Specification | Value |
|--------------------------------|-------------------------------------|
| Transmission Band 1 | T _{avg} > 90% 490 – 550 nm |
| Center Wavelength 1 | 520 nm |
| Guaranteed Minimum Bandwidth 1 | 60 nm |
| FWHM Bandwidth 1 (nominal) | 68 nm |
| Blocking Band 1 | OD _{avg} > 5 450 – 470 nm |
| Blocking Band 2 | OD _{avg} > 5 560 – 850 nm |
| Blocking Band 3 | OD _{avg} > Z XXX – YYY nm |
| Blocking Band 4 | OD _{avg} > Z XXX – YYY nm |

General Filter Specifications

| Specification | Value |
|-----------------------|--|
| Angle of Incidence | 0 ± 5 degrees |
| Cone Half-angle | 7 degrees |
| Optical Damage Rating | Testing has proven to show no signs of degradation when exposed to at least 6.0 W of power from an unfiltered xenon arc lamp over a 25 mm diameter (corresponding to 1.2 W/cm ²) for over 500 hrs. |
| Effective Index | 1.96 |

Physical Filter Specifications (applies to standard sized parts; contact us regarding other sizes)

| Specification | Value |
|--------------------------------------|------------------|
| Transverse Dimensions (Diameter) | 25 mm |
| Transverse Tolerance (mounted) | + 0.0 / - 0.1 mm |
| Filter Thickness (Mounted) | 3.5 mm |
| Filter Thickness Tolerance (Mounted) | ± 0.1 mm |
| Clear Aperture | ≥ 22 mm |
| Scratch-Dig | 60-40 |

| | |
|---|---|
| Substrate Thickness (unmounted) | 2.0 mm |
| Substrate Thickness Tolerance (unmounted) | ± 0.1 mm |
| Orientation | Arrow on ring indicates preferred direction of propagation of light |