


1064/1548 nm BrightLine® dual-band bandpass filter

Part Number: FF01-1064/1548-25

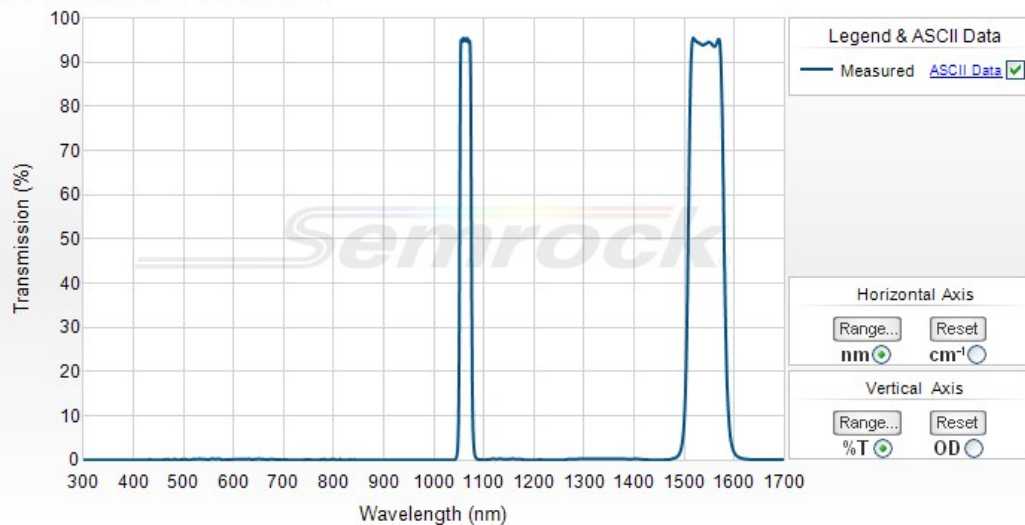

Semrock, Inc

3625 Buffalo Road, Suite 6
 Rochester, New York 14624

Main Phone: +1 585.594.7050 (worldwide)
 Toll Free Phone: 866.736.7625 (866-SEMROCK)
 (within US and Canada)

Your filter spectrum may differ slightly from the typical spectrum above, but is certified to meet the optical specifications noted below.



1064/1548 nm BrightLine® dual-band bandpass filter

Individual multiband fluorescence bandpass filters that utilize Semrock's patented single-substrate construction. These filters have extremely high transmission, steep and well-defined edges, and outstanding blocking between the passbands. All thin-film, hard-coated construction for unsurpassed performance and reliability.

Part Number	Size	Price ¹	Stock Status
FF01-1064/1548-25	25 mm x 3.5 mm	\$395	In Stock

This part is not available for custom sizing.

1) US domestic pricing only. If you are ordering from outside the US, please contact your nearest [regional distributor](#) for the correct list price.

Optical Specifications

Specification	Value
Transmission Band 1	T _{avg} > 90% 1059 – 1069 nm
Center Wavelength 1	1064 nm
Guaranteed Minimum Bandwidth 1	10 nm
FWHM Bandwidth 1 (nominal)	23.7 nm
Transmission Band 2	T _{avg} > 90% 1525 – 1570 nm
Center Wavelength 2	1547.5 nm
Guaranteed Minimum Bandwidth 2	45 nm
FWHM Bandwidth 2 (nominal)	73.5 nm
Blocking Band 1	OD _{avg} > 2.5 300 – 1040 nm
Blocking Band 2	OD _{avg} > 2.5 1092 – 1478 nm
Blocking Band 3	OD _{avg} > 2.5 1630 – 1700 nm
Blocking Band 4	

General Filter Specifications

Specification	Value
Angle of Incidence	0 ± 5 degrees
Cone Half-angle	7 degrees
Optical Damage Rating	Testing has proven to show no signs of degradation when exposed to at least 6.0 W of power from an unfiltered xenon arc lamp over a 25 mm diameter (corresponding to 1.2 W/cm ²) for over 500 hrs.
Effective Index	1.83

Physical Filter Specifications (applies to standard sized parts; contact us regarding other sizes)

Specification	Value
Transverse Dimensions (Diameter)	25 mm
Transverse Tolerance (mounted)	+ 0.0 / - 0.1 mm

Filter Thickness (Mounted)	3.5 mm
Filter Thickness Tolerance (Mounted)	± 0.1 mm
Clear Aperture	≥ 22 mm
Scratch-Dig	60-40
Substrate Thickness (unmounted)	2.0 mm
Substrate Thickness Tolerance (unmounted)	± 0.1 mm
Orientation	Arrow on ring indicates preferred direction of propagation of light