


561 nm EdgeBasic™ best-value long-pass edge filter

Part Number: BLP02-561R-25

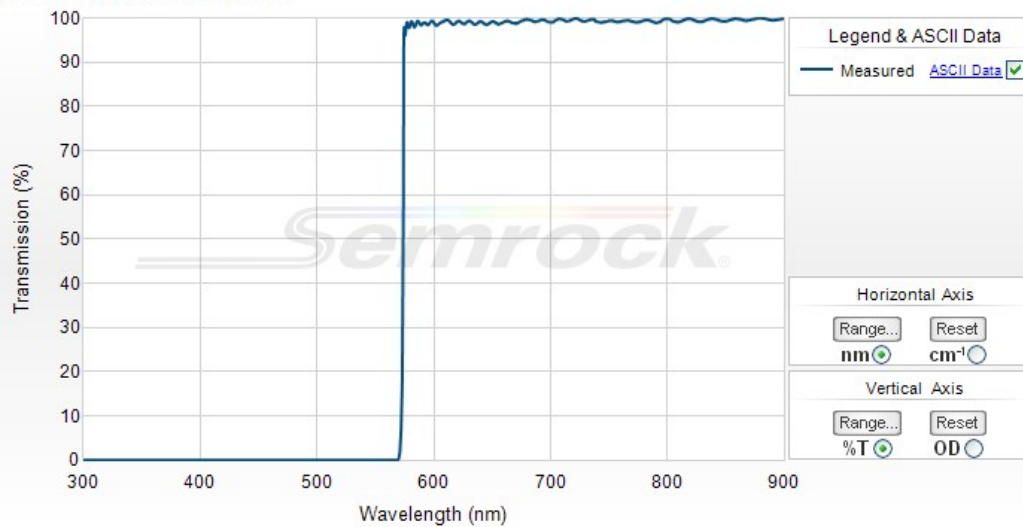

Semrock, Inc

3625 Buffalo Road, Suite 6
Rochester, New York 14624

Main Phone: +1 585.594.7050 (worldwide)
Toll Free Phone: 866.736.7625 (866-SEMROCK)
(within US and Canada)

Your filter spectrum may differ slightly from the typical spectrum above, but is certified to meet the optical specifications noted below.



561 nm EdgeBasic™ best-value long-pass edge filter

EdgeBasic filters offer an ideal combination of performance and value for applications including Raman spectroscopy and fluorescence imaging and measurements. They offer exceptional laser-line blocking and high transmission for Raman applications that do not require measuring the smallest possible Raman shifts and when cost is an issue.

Part Number	Size	Price ¹	Stock Status
BLP02-561R-25	25 mm x 3.5 mm	\$355	In Stock
BLP02-561R-23.3-D	23.3 mm x 2.0 mm (unmounted)	\$355	2nd Day Ship

Don't see a size you need? Contact us for custom sizing – available in less than a week (sizing fee applies).

¹) US domestic pricing only. If you are ordering from outside the US, please contact your nearest [regional distributor](#) for the correct list price.

Optical Specifications

Specification	Value
Transmission Band 1	T _{avg} > 93% 577.1 – 900 nm
Edge Wavelength 1	572 nm
Blocking Band 1	OD _{avg} > 5 200 – 449.1 nm
Blocking Band 2	OD _{abs} > 6 449.1 – 561.4 nm
Transition Width (nm)	14 nm
Transition Width (cm-1)	434.5 cm-1

General Filter Specifications

Specification	Value
Laser Wavelength 1	561.4 nm
Laser Wavelength 1 (low)	561.4 nm
Laser Wavelength 1 (high)	561.4 nm
Angle of Incidence	0 ± 2 degrees
Cone Half-angle	5 degrees
Optical Damage Rating	Not tested
Effective Index	1.83

Physical Filter Specifications (applies to standard sized parts; contact us regarding other sizes)

Specification	Value
Transverse Dimensions (Diameter)	25 mm
Transverse Tolerance (mounted)	+ 0.0 / - 0.1 mm
Filter Thickness (Mounted)	3.5 mm
Filter Thickness Tolerance (Mounted)	± 0.1 mm

Clear Aperture	≥ 22 mm
Scratch-Dig	60-40
Substrate Thickness (unmounted)	2.0 mm
Substrate Thickness Tolerance (unmounted)	± 0.1 mm
Orientation	Arrow on ring indicates preferred direction of propagation of light