
685 nm blocking edge BrightLine® long-pass filter

Part Number: FF01-685/LP-25



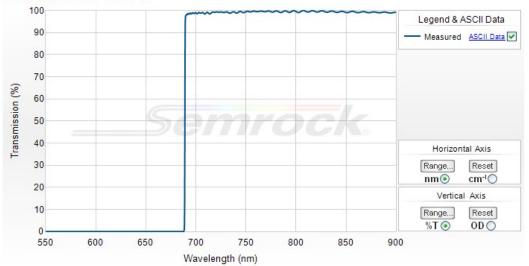

Semrock, Inc

3625 Buffalo Road, Suite 6 Rochester, New York 14624

Main Phone: +1 585.594.7050 (worldwide)
Toll Free Phone: 866.736.7625 (866-SEMROCK)
(within US and Canada)

Your filter spectrum may differ slightly from the typical spectrum above, but is certified to meet the optical specifications noted below.



685 nm blocking edge BrightLine® long-pass filter

Individual fluorescence long-pass and short-pass filters that have been optimized for use in a variety of fluorescence instruments. All thin-film, hard-coated construction for unsurpassed performance and reliability.

Part Number	Size	Price1	Stock Status
FF01-685/LP-25	25 mm x 3.5 mm	\$355	In Stock

Don't see a size you need? Contact us for custom sizing - available in less than a week (sizing fee applies).

1) US domestic pricing only. If you are ordering from outside the US, please contact your nearest regional distributor for the correct list price.

Optical Specifications

Specification	Value	
Transmission Band 1	Tavg > 93% 694 – 900 nm	
Edge Wavelength 1	690 nm	
Blocking Band 1	ODavg > 6 548 - 685 nm	
Blocking Band 2		
Blocking Band 3		

General Filter Specifications

Specification	Value	
Angle of Incidence	0 ± 5 degrees	
Cone Half-angle	7 degrees	
Optical Damage Rating	Testing has proven to show no signs of degradation when exposed to at least 6.0 W of power from an unfiltered xenon arc lamp over a 25 mm diameter (corresponding to 1.2 W/cm²) for over 500 hrs.	
Effective Index	2.01	

Physical Filter Specifications (Applies to standard sized parts. Contact us regarding other sizes.)

Specification	Value	
Transverse Dimensions (Diameter)	25 mm	
Transverse Tolerance (mounted)	+ 0.0 / – 0.1 mm	
Filter Thickness (Mounted)	3.5 mm	
Filter Thickness Tolerance (Mounted)	± 0.1 mm	
Clear Aperture	≥ 22 mm	
Scratch-Dig	60-40	
Substrate Thickness (unmounted)	2.0 mm	
Substrate Thickness Tolerance (unmounted)	± 0.1 mm	
Orientation	Arrow on ring indicates preferred direction of propagation of light	