



## PULSABLE IR SOURCE Model EF-8532



HelioWorks, Inc. offers a unique pulsable infrared emitter with three (3) radiating elements that can be addressed individually (4 lead package), or in total (2 lead package). It can operate in pulsed or steady state mode at a peak temperature of 700°C (973°K) in an industry standard TO-8 package with a Calcium Fluoride (CaF<sub>2</sub>) window. Specify either 2 lead (EF-8532-2) or 4 lead (EF-8532-4) versions. Photo shows 4 lead version.


### Key features include:

- Filament has uniform emitting area
- Emissivity is 0.88
- Calcium Fluoride (CaF<sub>2</sub>) window
- Operates in pulsed or steady state mode
- Industry standard TO-8 package
- Operates at peak temperature of 700°C (973°K)
- Large temperature change, ΔT, during pulsing


### Electrical Specifications:

Peak Voltage = 3.00 Volts DC MAXIMUM  
 Peak Current = 1.34 Amps  
 Peak Power = 4.0 Watts

**Current vs Voltage**

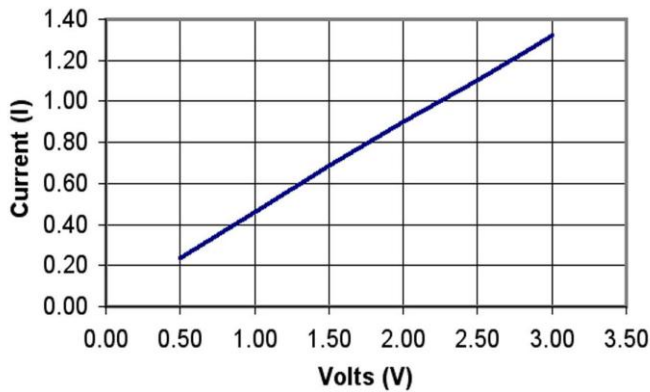


**Modulation (%) Vs. Frequency (Hz)  
50% duty cycle**

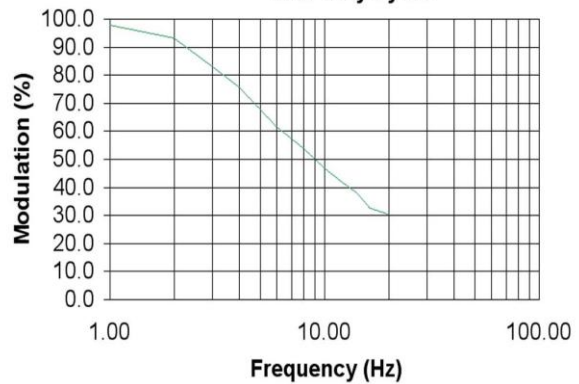

### **Radiant Exitance**

(V = 3.0, Distance = 2 inches from face)

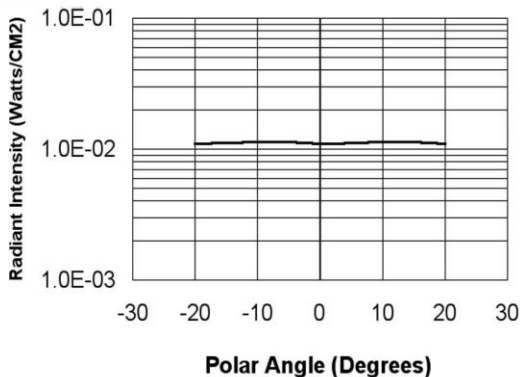

Polar Angle	Average (Watts/Cm)
-20	1.10E-02
-15	1.12E-02
-10	1.14E-02
-5	1.13E-02
0	1.10E-02
5	1.11E-02
10	1.13E-02
15	1.13E-02
20	1.10E-02

