



HELIOWORKS

"Out Shines All Others"

PULSABLE IR SOURCE Model EP-3964*



Helioworks, Inc. offers a unique Pulsable infrared emitter with a tungsten filament and sapphire window that provides mid IR radiation to over 5 microns. It can operate in pulsed or steady state mode at temperatures in excess of 1900^oK in an industry standard TO-8 package.

Key features include:


- Tungsten filament
- Pulsed or steady state mode
- Internal gold plated parabolic reflector
- Sapphire window
- Standard TO-8 package

Electrical Specifications:


Peak Voltage = 3.5 Volts DC MAXIMUM
Peak Current = 1.0 Amp
Peak Power = 3.5 Watts

*Patented

Current vs Voltage

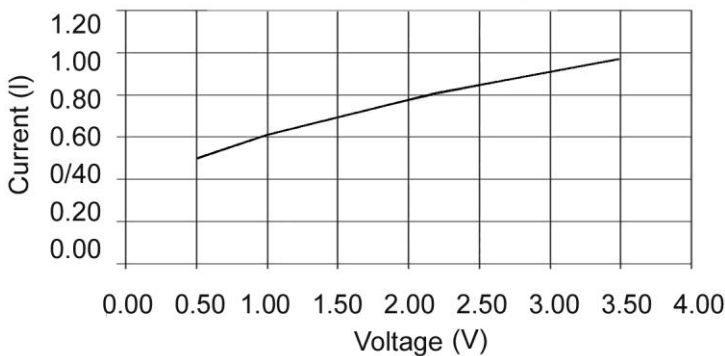


Modulation vs. Frequency (50% Duty Cycle)

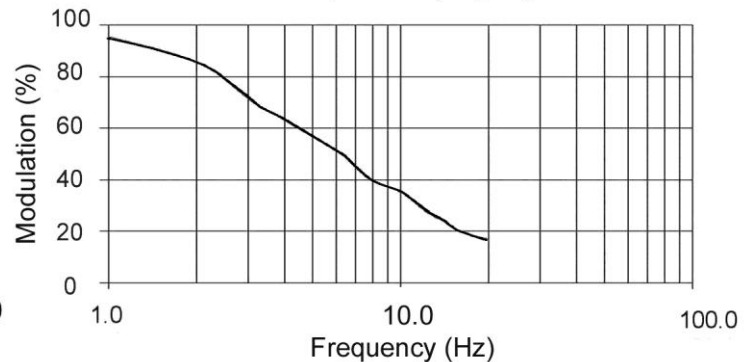

Radiance (Watts/Cm2)

Volts = 3.5, Distance = 3.0 inches from source

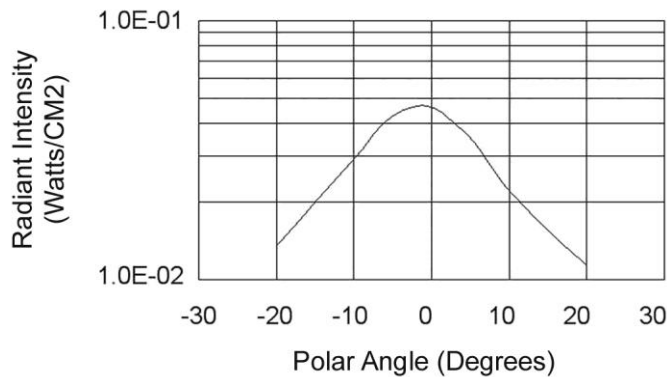

Polar Angle	Average (W/CM2)
-20	1.35E-02
-15	2.00E-02
-10	2.90E-02
-5	4.30E-02
0	4.65E-02
5	3.50E-02
10	2.20E-02
15	1.55E-02
20	1.15E-02